




### 387 single Pegaso

Housing: 6 mm. thick fibreglass reinforced polyester  
Support: Die cast aluminium with pole connection also made of die cast aluminium.

Pole designed for Pegaso:  $\varnothing$  102 silver colour steel. Complete with inspection window with removable terminal strip. The version with base comes complete with a plinth, 4 tie rods to be buried, bolts, nuts and caps  
Single or double polyester plate to create indirect lighting effects. To be used mounted directly on the pole together with the fittings of the various products to install Pegaso on the poles - access. 1492/1494.

**RECOMMENDED FLOODLIGHTS TO BE USED WITH PEGASO**

Use of the most appropriate floodlight according to the environment where installed is recommended.

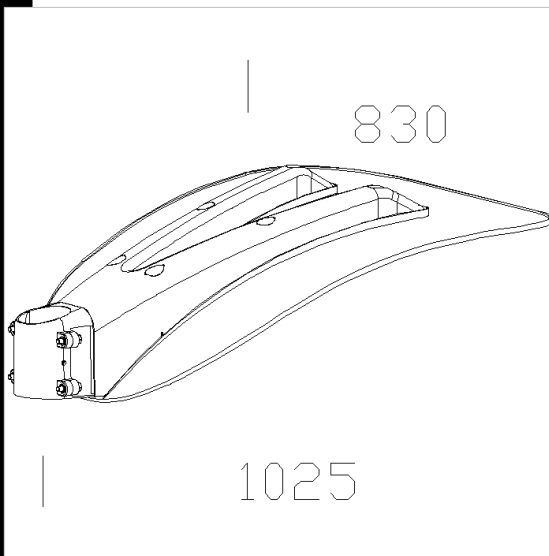

Code	Kg	WTot	Colour
991391-00	15.80	0 W	GREY9007

#### Posts



- 1487 poles to be sunk into the



- 1485 pole with base - Pegaso

#### Products



- 1521 Elfo for Pegaso CDM-T70



- 1292 Cilindro - direct light



- 1290 Cilindro - direct and indirect light



- 1291 Cilindro - direc indirect light with lens



- 1522 Elfo for Pegaso CDM-T150



- 1561 Elfo LED for Pegaso - COB



- 1293 Cilindro 4

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm$  10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated