

## 5 fiberglass pole

Fiberglass poles have a round or cone-shaped cross-section (dimensions depend on mechanical requirements).

Compared with aluminium or steel poles they offer the following advantages:

- lighter weight
- less maintenance
- surfaces are not attacked by corrosive agents
- electrically insulated
- less dangerous when impact occurs
- extremely flexible in the wind.

Certificated poles: These poles are recommended for small-size luminaires (decorative factor), in private areas, (anti-vandalism factor). They can be installed both on a base or buried according to measurements.

Cone-shaped fibreglass pole, black, corrosion resistant, mechanical high-resistance and UV stabilized. The pole can be installed on base acc. 50 without sinking it into the ground, maximum height 1900 m.

NOTE. Before selecting the appropriate pole, make all necessary wind pressure resistance tests, pursuant to the Standards or Legislative Decrees in force in the countries where the pole will be mounted and based on the assumed loads specified in Standard EN 40-3-1. An accurate and suitable protection or insulation of the surfaces involved is recommended to avoid any direct contact with the new masonry or concrete screed

### Download

DXF 2D


- 5.dxf

3DS

- disano\_5\_pole\_1e5m.3ds
- disano\_5\_pole\_1m.3ds
- disano\_5\_pole\_2e2m.3ds
- disano\_5\_pole\_2e65m.3ds
- disano\_5\_pole\_2m.3ds

3DM

- disano\_5\_pole\_1e5m.3dm
- disano\_5\_pole\_1m.3dm
- disano\_5\_pole\_2e2m.3dm
- disano\_5\_pole\_2e65m.3dm
- disano\_5\_pole\_2m.3dm

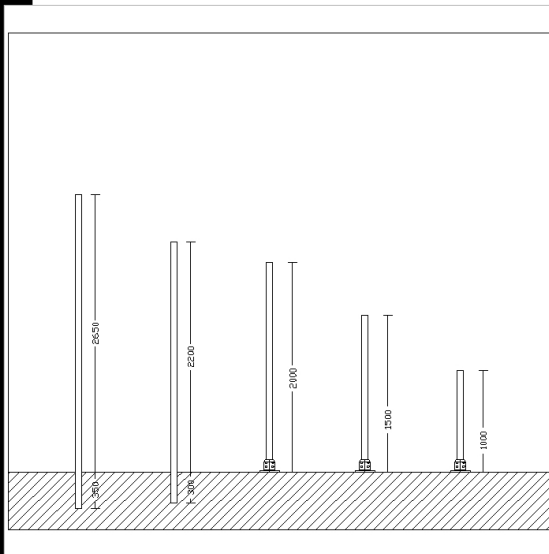

Code	Kg	Colour	Dimension	Aboveground	Underground
991904-00	1.20	BLACK	0x0x1500 ø60	1250	250
991903-00	0.80	BLACK	0x0x1000 ø60	800	200
991905-00	1.60	BLACK	0x0x2000 ø60	1750	250
991906-00	2.00	BLACK	0x0x2500 ø60	2200	300
991907-00	2.40	BLACK	0x0x3000 ø60	2650	350

### Accessories



- 115 pole plug



- 1266 tilting joint



- 50 Base for acc.5



- 89 ø60 pole mounting



- 120 pole mount

### Products



- 1537 Koala ES



- 1203 Kenia



- 1201 Giordania



- 1285 Green



- 1517 Clima LED



- 1518 Clima LED against light pollution



- 1758 Olbia 1



- 1335 Globo LED against light pollution

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Products



- 1759 Olbia 2 - LED



- 1512 Bastia - LED



- 1221 Bastia



- 1779 Musa LED



- 1264 Vega LED



- 1570 Clima - LED



- 1205 Polar



- 1774 Amalfi



- 1275 Green



- 1280 Garden



- 1777 Musa LED bike trails - pedestrian



- 1537 Koala - COB

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated