


339 connector

To be used for mains connection.

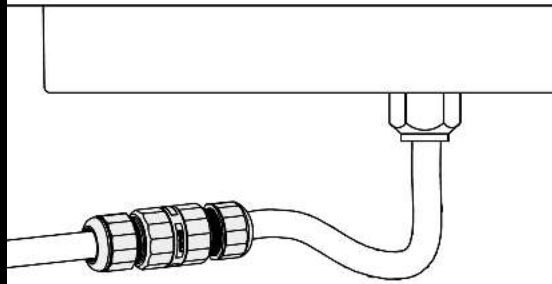

Download

Code	Kg	WTot	Colour
993854-00	0,01	0 W	BLACK

Prodotti



- 1768 Sicura - FS symmetric



- 1769 Sicura - FL symmetric



- 1775 Sicura - elliptical LED



- 1710 Cripto COB small - Wide



- 1712 Cripto small - symmetric



- 1711 Cripto small - asymmetric



- 1980 Micro Rodio - COB



- 1982 Micro Rodio - asymmetric



- 1983 Micro Rodio - symmetric narrow beam



- 1984 Micro Rodio - symmetric wide beam



- 1700 Cripto micro - COB



- 1701 Cripto micro - asymmetric



- 1702 Cripto micro - symmetric wide beam



- 1703 Cripto micro - symmetric narrow beam

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated