


Download

DXF 2D
- d6510.dxf



6510 hanger

Suspension supplied with Ø 2 mm steel wire, 1.5 m long. Max load: 30 kg. To suspend acc 6018.

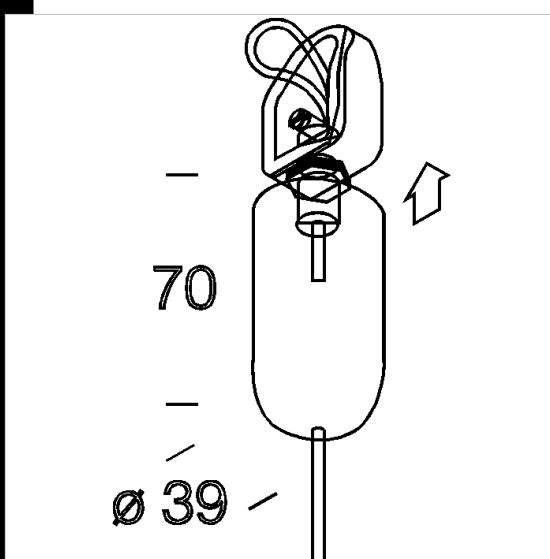

Code	Kg	WTot	Colour
993914-00	0,09	0 W	WHITE

Prodotti



- 6102 Canale Elesystem: 7



- 6100 Canale Elesystem: 10



- 6000 Rapid System - power



- 6101 Canale Elesystem: 5



- 6600 Techno System - 90°
symmetric - CRI 90



- 6601 Techno System - 25°
asymmetric - CRI 90



- 6602 Techno System - 25° bi-
asymmetric - CRI 90



- 6603 Techno System - 30°x80°
elliptical - CRI 90



- 6604 Techno System - 60°
wide-beam - CRI 90



- 6605 Techno System - wide-
beam semi-spherical diffuser -
CRI 90



- 6600 Techno System - 90°
symmetric - CRI 80



- 6601 Techno System - 25°
asymmetric - CRI 80



- 6602 Techno System - 25° bi-
asymmetric - CRI 80



- 6603 Techno System - 30°x80°
elliptical - CRI 80



- 6606 Techno System HE -
UGR - CRI 80



- 6605 Techno System - wide-
beam - with semi-spherical
diffuser - Ceiling



- 6611 Techno System HE - 90°



- 6615 Techno System HE - 60°



- 6614 Techno System HE -



- 6612 Techno System HE - 25°



- 6613 Techno System HE - 25°
bi-asymmetric - CRI 80



- 6616 Techno System HE -
wide-beam semi-spherical
diffuser - CRI 80



- 6617 Techno System HE - 90°
Opal symmetric - CRI 80

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated