


2512 wire

Steel wire, Ø 1.5mm. For suspension with acc. 2510-2511.






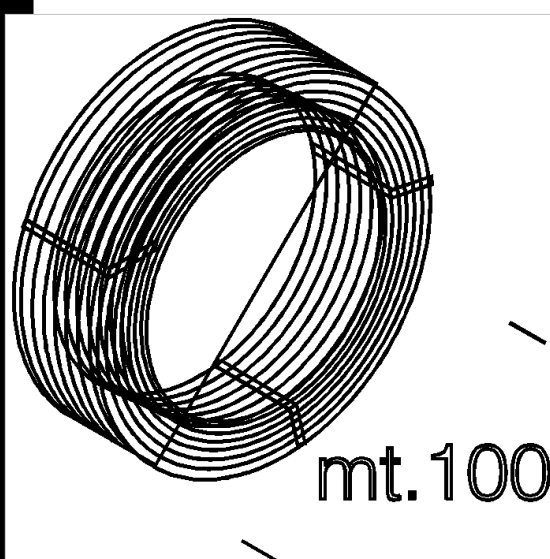












Download

DXF 2D  
- d2512.dxf



Code	Kg	WTot	Colour
994018-00	0,10	0 W	STEEL

Prodotti

 - 773 Comfort T8 - high-gloss	 - 3120 Ghost - clear diffuser	 - 775 Comfort T8 - matt 99.99	 - 3113 Ghost - direct and indirect
 - 3112 Ghost - painted diffuser	 - 727 Comfort T8 - frosted diffuser	 - 3123 Ghost - direct and indirect light	 - 777 Comfort T8 - matt scored
 - 3121 Ghost - metallic internal diffuser	 - 774 Comfort T8 - high-gloss 99.85	 - 776 Comfort T8 - matt	 - 753 Minicomfort T5 high-gloss 99.85
 - 773 Comfort T5 - high-gloss 99.99	 - 775 Comfort T5 - matt 99.99	 - 750 Minicomfort T5 high-gloss 99.99	 - 3110 Ghost - clear diffuser
 - 3111 Ghost - metallic internal	 - 3122 Ghost - painted diffuser		

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated