
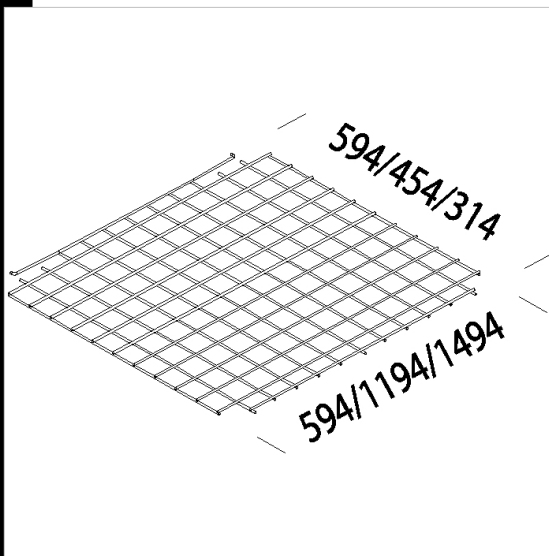


219 protective guard

In white plastic-coated round frame. To protect the system from impacts.

Download

DXF 2D
- 219.dxf



| Code | Kg | Lumen-K-CRI | WTot | Base | Colour |
|-----------|------|----------------------------------------------------------|------|----------|--------|
| 994671-00 | 1.29 | FL 2x80-6550lm-4000k-Ra 1b FL 2x49-4350lm-4000K-Ra 1b | 0 W | G5 G5 | WHITE |
| 994670-00 | 1.83 | FL 2x54-4460lm-4000K-Ra 1b | 0 W | G5 | WHITE |
| 994674-00 | 1.04 | FL 4x24-1750lm-4000K-Ra 1b | 0 W | G5 | WHITE |
| 994676-00 | 3.27 | FL 4x49-4350lm-4000K-Ra 1b FL 4x80-6550lm-4000k-Ra 1b | 0 W | G5 G5 | WHITE |
| 994675-00 | 2.61 | FL 4x54-4450lm-4000K-Ra 1b | 0 W | G5 | WHITE |

Products



- 2654 Evoluzione - wide beam



- 2655 Evoluzione - narrow beam

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated