





Download

DXF 2D

- 321.dxf

321 outer shell

To install Safety into the ground. In thermoplastic material

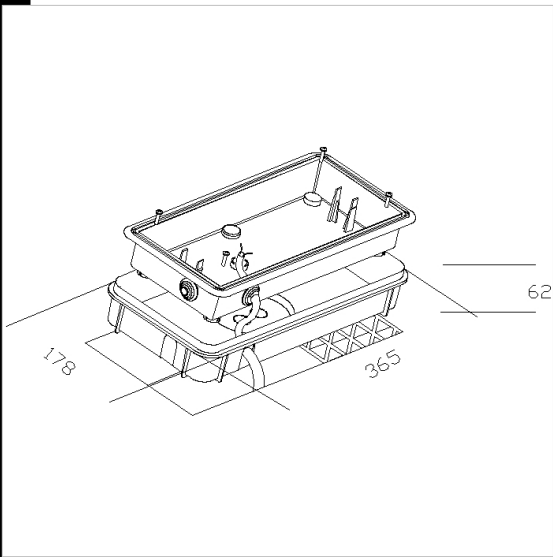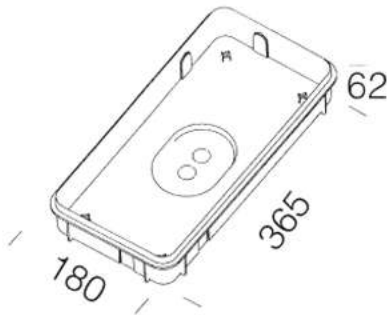

Code	Kg	WTot	Colour
995210-00	0,25	0 W	BLACK

Prodotti



- 615 Safety only 1hr maintained

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated