




Download

384 conveyor 4-8 COB

In aluminium, graphite. To be used for conveying the light beam in a single direction.

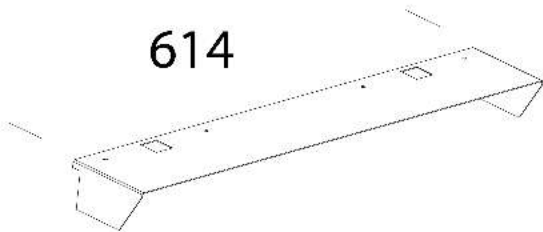

Code	Kg	WTot	Colour
995794-00	0,00	0 W	GRAPHITE

Prodotti



- 2153 Radon HE - symmetric 2



- 2150 Radon HE - asymmetric 1



- 2151 Radon HE - asymmetric 2



- 2152 Radon HE - symmetric 1



- 2155 Radon HP - asimmetrico 1 MODULE



- 2156 Radon HP - asymmetric 2 MODULES



- 2157 Radon HP - symmetric 1 MODULE



- 2158 Radon HP - symmetric 2 MODULES

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated