




Download

Montaggi
- 99767300411041.pdf

Type 2 - Driver IP66 - DALI

-complete with quick connector -ambient temperature: -40°C + 50°C • input voltage AC: 220-400V -frequency: 50/60Hz -power factor: 0.95 -Low Flicker <3%

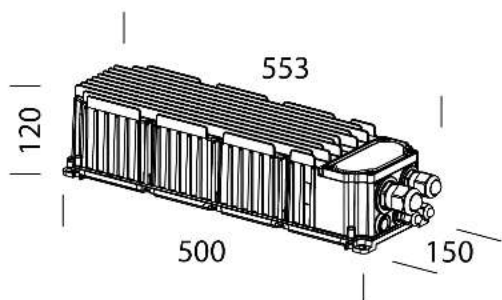

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
997673-00411041	CLD CELL-D-D	9,00	1200mA---	0 W	GREY
997673-08411041	CLD CELL-D-D	9,00	1300mA---	0 W	GREY

Prodotti



- 3196 Forum LED - 3



- 3198 Forum LED - 3



- 3192 Forum LED - 3



- 3195 Forum LED - 3



- 3231 Forum LED - 3
MODULES - symmetric M



- 3230 Forum LED - 3
MODULES - symmetric MS



- 3232 Forum LED - 3
MODULES - symmetric XW



- 3194 Forum LED - 3
MODULES - asymmetric 60°

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated