
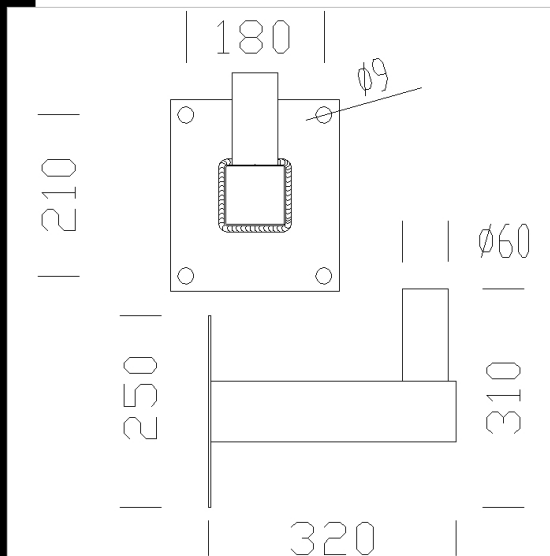


72 wall mount

In painted hot-dip galvanized steel, with mounting plate.
Used for wall mounting.



Code	Kg	WTot	Colour
997910-00	4,00	0 W	BLACK

Pali



- 1491 poles to be sunk into the



- 1493 pole with base

Prodotti



- 1597 Vista - with louvre



- 1599 Vista



- 1502 Polar



- 1595 Vista - with opal diffuser



- 1152 Tonale 1 - Glass diffuser



- 1214 Clima



- 1652 Giovi



- 1598 Vista - indirect light



- 1504 Clima



- 1654 Giovi bike trails



- 1240 Torpedo



- 1514 Clima for zona 1



- 1598 Vista



- 1202 Polar



- For roads, shop-lined and private - 1141 Sempione



- 1204 Clima

Download

DXF 2D
- d72.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated