





3° IP
IK

Download

DXF 2D
- 334.dxf

334 pole mounting diam. 76

In aluminum. The installation concurs on pole from 76

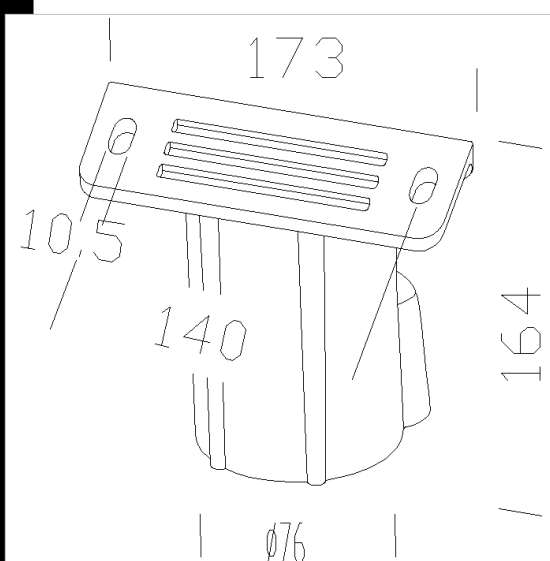

Code	Kg	WTot	Colour
997916-00	0,80	0 W	GRAPHITE

Prodotti



- 1802 Rodio 2 symmetric



- 1803 Rodio 3 asymmetric



- 1801 Rodio 2 asymmetric



- 1804 Rodio 3 symmetric



- 1157 Indio



- 1802 Rodio 2 symmetric



- 1801 Rodio 2 asymmetric
double isolation



- 1804 Rodio 3 symmetric
double isolation



- 1159 Indio - asymmetric



- 1803 Rodio 3 asymmetric
double isolation



- 1228 Cromo - symmetric "W"



- 1229 Cromo - symmetric "XW"



- 1826 Mini-Olympic - asymmetric
- wide beam



- 1828 Mini-Olympic - asymmetric
- wide beam - SA



- 1829 Mini-Olympic - asymmetric
- narrow beam



- 1830 Mini-Olympic - asymmetric
- narrow beam LA



- 1831 Mini-Olympic - asymmetric



- 1151 Indio - LED asymmetric



- 1144 Litio - LED asymmetric



- 1158 Indio



- 1155 Indio - LED symmetric



- 1833 Rodio - Concentrante



- 1827 Mini-Olympic - asymmetric
- wide beam - LA



- 1834 Rodio - narrow beam



- 1885 Rodio LED HT -
asymmetric



- 1897 Rodio - COB symmetric



- 1998 Mini Rodio - COB
asymmetric



- 1888 Rodio LED - symmetric
narrow beam

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Prodotti

	- 1891 Rodio LED - symmetric wide beam		- 1890 Rodio LED - symmetric wide beam		- 1887 Rodio LED - asymmetric		- 1889 Rodio LED HT - symmetric wide beam
	- 1892 Rodio LED - street type		- 1886 Rodio LED HT - symmetric narrow beam		- 1893 Rodio LED - asymmetric 45°		- 1894 Rodio LED - asymmetric 60°
	- 1898 Rodio - COB asymmetric		- 1890 Mini Rodio - symmetric wide beam		- 1999 Mini Rodio - COB symmetric		- 1898 Mini Rodio - symmetric narrow beam
	- 1991 Mini Rodio - symmetric wide beam		- 1987 Mini Rodio - asymmetric		- 1224 Cromo - asymmetric narrow beam		- 1225 Cromo - asymmetric wide beam
	- 1226 Cromo - symmetric "MS"		- 1227 Cromo - symmetric "M"				

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated