



Download

DXF 2D
- d6020.dxf

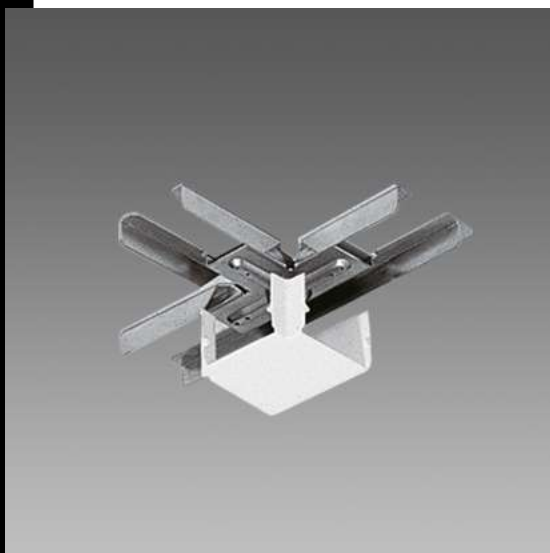

6020 unión en T

De acero cincado, con cobertura de material termoplástico blanco. Para la unión de 3. Utilizar conjuntamente con el acc. 6622.

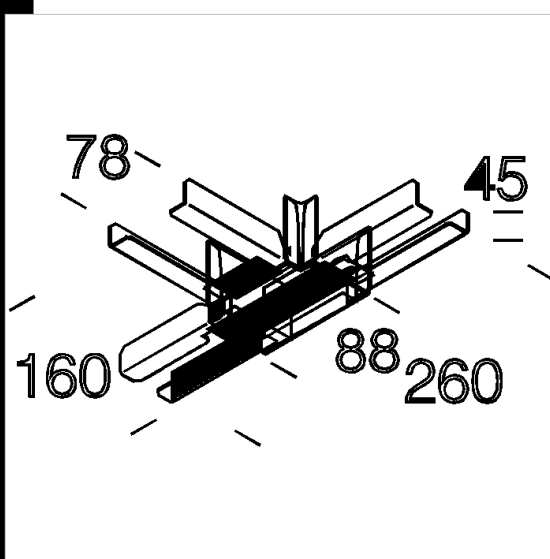

Code	Kg	WTot	Colour
132904-00	0,32	0 W	BLANCO

Prodotti



- 6000 Rapid System - carril



- 6502 Rapid system -



- 6402 Rapid system -



- 6600 Techno System -



- 6601 Techno System - asimétrico 25° - CRI 90



- 6602 Techno System - bi-asimétrico 25° - CRI 90



- 6603 Techno System - elíptico 30°x80° - CRI 90



- 6604 Techno System - extensivo 60° - CRI 90



- 6605 Techno System - extensivo difusor semiesférico - CRI 90



- 6600 Techno System - simétrico 90° - CRI 80



- 6601 Techno System - asimétrico 25° - CRI 80



- 6602 Techno System - bi-asimétrico 25° - CRI 80



- 6603 Techno System - elíptico 30°x80° - CRI 80



- 6606 Techno System HE - UGR - CRI 80



- 6611 Techno System HE - simétrico 90° - CRI 80



- 6615 Techno System HE - extensivo 60° - CRI 80



- 6614 Techno System HE -



- 6612 Techno System HE -



- 6613 Techno System HE - bi-



- 6616 Techno System HE - extensivo difusor semiesférico -



- 6617 Techno System HE - 90° Opal symmetric - CRI 80

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated