


Download

DXF 2D
- v_005087.dxf



Suspensión electrificada bilámpara

Suspensin ajustable completa de cable de acero (l=1,5 m) y roseta de niln f.v. con cable dealimentacin espiralado (mx 2.000 W). Carga mx: 20 Kg. Slo para lasuspensin de la tapa acc. 5069.

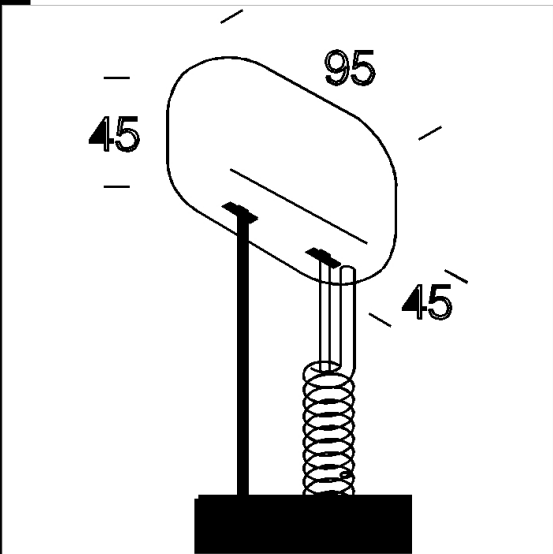

Code	Kg	WTot	Colour
22005087-00	0,00	0 W	BLANCO

Prodotti



- Compendio G

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated