




Download
DXF 2D
- 5222.dxf



Difusor intensivo Ø 82 mm

De acero. Canaliza el haz luminoso hacia una nica direccin. Para DICR, ALO.

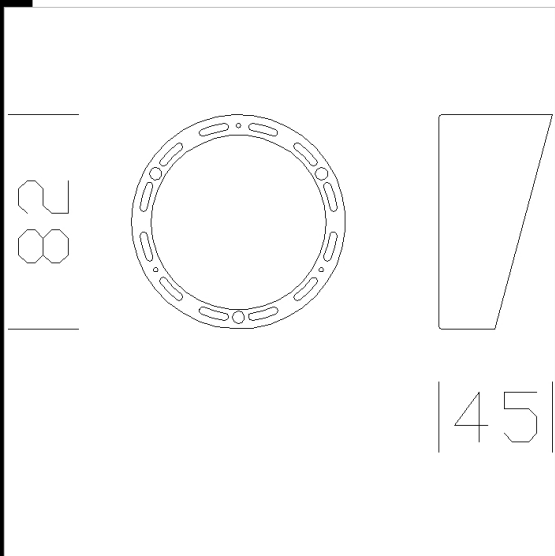

Code	Kg	WTot	Colour
22005277-00	0,50	0 W	PLATA
22005232-00	0,20	0 W	NEGRO
22005222-00	0,20	0 W	BLANCO

Prodotti

 - Vision C+M - CDM-R	 - Vision C+M short - CDM-R -	 - Vision C+M - CDM-TC	 - Vision C+M short - CDM-TC -
 - Vision C+M short - CDM-TC - FM - Base	 - Vision C+M short - CDM-R - Base	 - Mini Leo 5 - Base	 - Matrix A2 MASTERLED
 - Mini Leo 5 - Adaptador Universal			

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated