


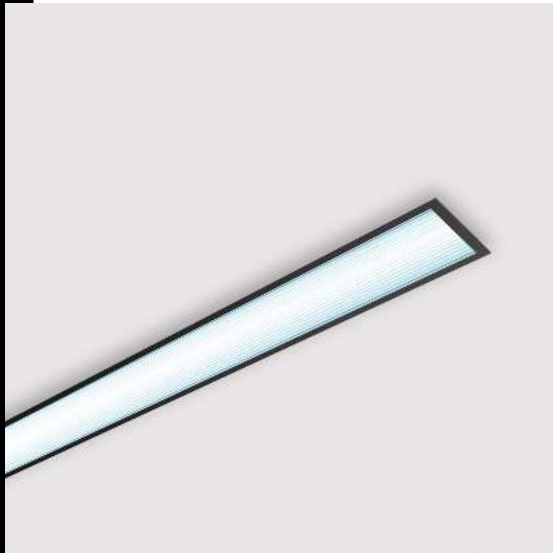

Minilinea B - LED

Lámpara para empotrar o para colgar lineal para la iluminación directa. Se presenta completamente neutra, pero al mismo tiempo reproduce un efecto elegante en el espacio. Encuentra aplicaciones en las oficinas y es apropiada también para las superficies individuales de trabajo o casas particulares.

Cuerpo: de aluminio extrudido.

Difusor: de policarbonato con estructura prismática.

Normativa: fabricado conforme a las normativas vigentes EN60598-1 CEI 34-21, grado de protección según la normativa EN 60529.

Factor de potencia: >0,95


Mantenimiento del flujo luminoso al 70% 50000h L70B50

Clase de seguridad fotobiológica Grupo exento EN62471

Download

DXF 2D
- minilinea b.dxf

Montaggi
- MINILINEA_B_LED rev4.pdf

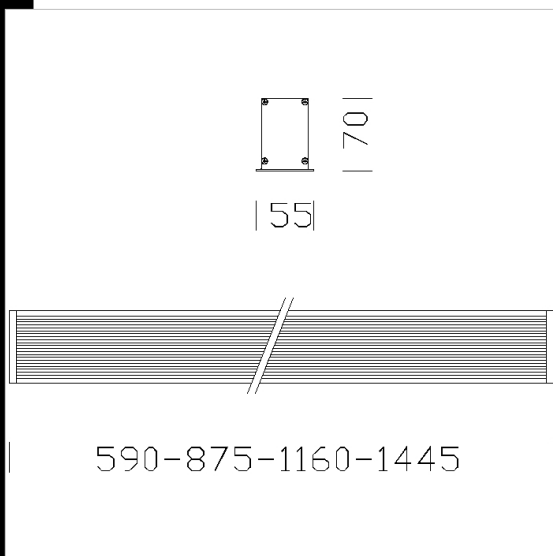

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010870-00	CLD CELL	1,45	LED-1085lm-4000K-CRI 80	14 W	OXIDADO
22010870-12	CLD CELL-D	1,45	LED-1085lm-4000K-CRI 80	14 W	OXIDADO
22010870-1241	CLD CELL-D-D	1,41	LED-1085lm-4000K-CRI 80	14 W	OXIDADO
22010870-09	CLD CELL-E	0,00	LED-1085lm-4000K-CRI 80	14 W	OXIDADO
22010870-31	CLD CELL-E	0,00	LED-1085lm-4000K-CRI 80	14 W	OXIDADO
22010870-39	CLD CELL	1,34	LED-1010lm-3000K-CRI 80	14 W	OXIDADO
22010870-1228	CLD CELL-D	0,00	LED-1010lm-3000K-CRI 80	14 W	OXIDADO
22010870-3941	CLD CELL-D-D	0,00	LED-1010lm-3000K-CRI 80	14 W	OXIDADO
22010870-0928	CLD CELL-E	0,00	LED-1010lm-3000K-CRI 80	14 W	OXIDADO
22010870-3957	CLD CELL-E	0,00	LED-1010lm-3000K-CRI 80	14 W	OXIDADO
22010871-00	CLD CELL	1,20	LED-1626lm-4000K-CRI 80	21 W	OXIDADO
22010871-12	CLD CELL-D	1,89	LED-1626lm-4000K-CRI 80	20 W	OXIDADO
22010871-1241	CLD CELL-D-D	1,70	LED-1626lm-4000K-CRI 80	21 W	OXIDADO
22010871-09	CLD CELL-E	0,00	LED-1626lm-4000K-CRI 80	21 W	OXIDADO
22010871-31	CLD CELL-E	0,00	LED-1626lm-4000K-CRI 80	21 W	OXIDADO
22010871-39	CLD CELL	1,80	LED-1512lm-3000K-CRI 80	21 W	OXIDADO
22010871-1228	CLD CELL-D	1,73	LED-1512lm-3000K-CRI 80	21 W	OXIDADO
22010871-3941	CLD CELL-D-D	1,41	LED-1512lm-3000K-CRI 80	21 W	OXIDADO
22010871-0928	CLD CELL-E	0,00	LED-1512lm-3000K-CRI 80	21 W	OXIDADO
22010871-3957	CLD CELL-E	0,00	LED-1512lm-3000K-CRI 80	21 W	OXIDADO
22010872-00	CLD CELL	2,30	LED-2169lm-4000K-CRI 80	27 W	OXIDADO
22010872-12	CLD CELL-D	2,23	LED-2169lm-4000K-CRI 80	27 W	OXIDADO
22010872-1241	CLD CELL-D-D	2,20	LED-2169lm-4000K-CRI 80	27 W	OXIDADO
22010872-09	CLD CELL-E	2,67	LED-2169lm-4000K-CRI 80	27 W	OXIDADO
22010872-31	CLD CELL-E	0,00	LED-2169lm-4000K-CRI 80	27 W	OXIDADO
22010872-39	CLD CELL	2,30	LED-2017lm-3000K-CRI 80	29 W	OXIDADO
22010872-1228	CLD CELL-D	2,30	LED-2017lm-3000K-CRI 80	29 W	OXIDADO
22010872-3941	CLD CELL-D-D	2,01	LED-2017lm-3000K-CRI 80	27 W	OXIDADO
22010872-0928	CLD CELL-E	0,00	LED-2017lm-3000K-CRI 80	27 W	OXIDADO
22010872-3957	CLD CELL-E	0,00	LED-2017lm-3000K-CRI 80	27 W	OXIDADO
22010873-00	CLD CELL	2,50	LED-2710lm-4000K-CRI 80	34 W	OXIDADO
22010873-12	CLD CELL-D	2,70	LED-2710lm-4000K-CRI 80	34 W	OXIDADO

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Minilinea B - LED

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22010873-1241	CLD CELL-D-D	0,97	LED-2710lm-4000K-CRI 80	34 W	OXIDADO
22010873-09	CLD CELL-E	3,06	LED-2710lm-4000K-CRI 80	34 W	OXIDADO
22010873-31	CLD CELL-E	0,00	LED-2710lm-4000K-CRI 80	34 W	OXIDADO
22010873-39	CLD CELL	2,50	LED-2520lm-3000K-CRI 80	36 W	OXIDADO
22010873-1228	CLD CELL-D	2,69	LED-2520lm-3000K-CRI 80	35 W	OXIDADO
22010873-3941	CLD CELL-D-D	2,39	LED-2520lm-3000K-CRI 80	34 W	OXIDADO
22010873-0928	CLD CELL-E	0,00	LED-2520lm-3000K-CRI 80	34 W	OXIDADO
22010873-3957	CLD CELL-E	0,00	LED-2520lm-3000K-CRI 80	34 W	OXIDADO

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated