


Download

DXF 2D
- 22011610.dxf
Montaggi
- SINTESI-Spot rev1.pdf



Sintesi Spot - UGR<22 - módulo luminoso

En aluminio extruido con fijación de unión. Permite la alineación mecánica de los perfiles. Módulo luminoso con reflector en policarbonato V0 metalizado de alto rendimiento con micro faceta.

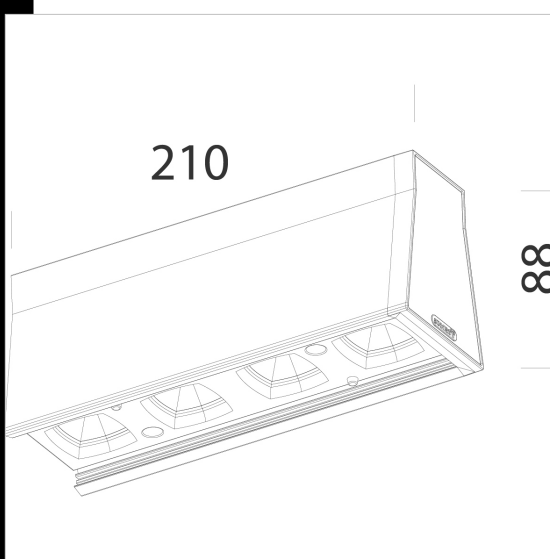

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
22011610-00	CLD	1,00	LED-4320lm-4000K-CRI 80	32 W	BLANCO

Prodotti

	- Sintesi System - techo -		- Sintesi System - suspensión		- Sintesi System - techo - con		- Sintesi System - suspensión -
	- Sintesi System - suspensión luz directa/indirecta - con pantalla UGR<19		- Sintesi System - techo - óptica Dark - UGR<19		- Sintesi System - suspensión - óptica Dark - UGR<19		- Sintesi System - suspensión luz directa/indirecta - óptica Dark - UGR<19
	- Sintesi System - techo con pantalla satinada - UGR<22		- Sintesi System - suspensión con pantalla satinada - UGR<22		- Sintesi System - suspensión luz directa/indirecta - con pantalla satinada - UGR<22		- Sintesi System - techo bi-asimétrica 25° - UGR<22
	- Sintesi System - techo asimétrica 25° - UGR<22		- Sintesi System - suspensión luz directa/indirecta - extensiva 60° - UGR<22		- Sintesi System - suspensión - extensiva		

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated