



Download


DXF 2D
- microprof.dxf

Montaggi
- MICRO_LISET_CILINDRICA_PRO
rev3.pdf



Micro Liset - Cylindric Professional

Cuerpo: estructura en perfil de aluminio anodizado con terminales de aluminio pintado para exterior, con conector estanco IP65. Difusor interno: de PMMA opalino. Difusor externo: tubo de PMMA transparente estabilizado a los rayos UV, antichoque. LED: Mantenimiento del flusso luminoso al 80%: 50.000h (L80B20)
On request 24V version (620mm-905mm-1190mm-1475mm-3450mm max)

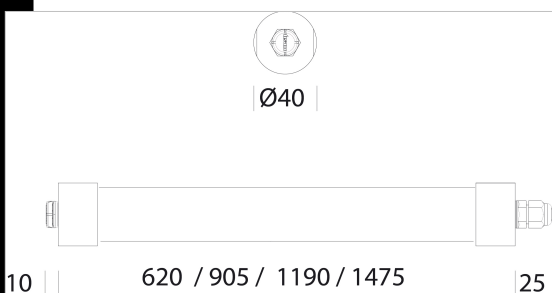

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22013070-00	CLD S+L	0,57	LED-1501lm-3000K-CRI 80	13 W	OXIDADO
22013070-1241	CLD-D-D	1,04	LED-1501lm-3000K-CRI 80	13 W	OXIDADO
22013070-68	CLD S+L	0,57	LED-1606lm-4000K-CRI 80	13 W	OXIDADO
22013070-6841	CLD-D-D	1,09	LED-1606lm-4000K-CRI 80	13 W	OXIDADO
22013071-00	CLD S+L	0,78	LED-2252lm-3000K-CRI 80	19 W	OXIDADO
22013071-1241	CLD-D-D	0,78	LED-2252lm-3000K-CRI 80	19 W	OXIDADO
22013071-68	CLD S+L	0,75	LED-2410lm-4000K-CRI 80	19 W	OXIDADO
22013071-6841	CLD-D-D	0,78	LED-2410lm-4000K-CRI 80	19 W	OXIDADO
22013072-00	CLD S+L	0,97	LED-3002lm-3000K-CRI 80	25 W	OXIDADO
22013072-1241	CLD-D-D	0,97	LED-3002lm-3000K-CRI 80	25 W	OXIDADO
22013072-68	CLD S+L	0,95	LED-3212lm-4000K-CRI 80	25 W	OXIDADO
22013072-6841	CLD-D-D	0,95	LED-3212lm-4000K-CRI 80	25 W	OXIDADO
22013073-00	CLD S+L	1,13	LED-3754lm-3000K-CRI 80	31 W	OXIDADO
22013073-1241	CLD-D-D	1,13	LED-3754lm-3000K-CRI 80	31 W	OXIDADO
22013073-68	CLD S+L	1,13	LED-4017lm-4000K-CRI 80	31 W	OXIDADO
22013073-6841	CLD-D-D	1,13	LED-4017lm-4000K-CRI 80	31 W	OXIDADO

Accessori



- Caja estanca IP65 para LED -
700mA



- Suspensión simple

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated