




Download

DXF 2D
- omnih.dxf



Omnitrack H - Dimm - 6 conductors

Omnitrack H de 6 conductores: nuevo carril en «H» que permite usar, en la parte inferior, un alumbrado directo mediante proyectores y en la parte superior crear luz indirecta mediante la introducción de tiras de LED o módulos de LED de vario tipo.

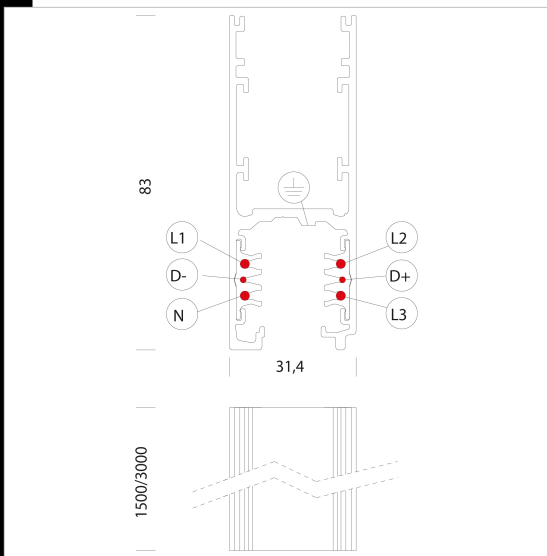

Code	Gear	Kg	WTot	Colour
22013210-00	S	2,36	0 W	BLANCO
22013213-00	S	4,74	0 W	BLANCO

Accessori



- Suspensión simple



- Cable para suspensión



- Fijación en suspensión



- Adaptador mecánico



- Roseta para tijas



- Suspensión simple



- T-shaped, external left sided joint H



- Suspensión simple Q



- Unión lineal



- Suspension bracket



- Jointing bracket



- Power supply H - sx



- Linear joint H



- External L-shaped Joint H



- Internal L-shaped joint H



- T-shaped, internal right sided joint H



- T-shaped, external right sided joint H



- T-shaped, internal left sided joint H



- Cross joint H



- Power supply H - dx

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated