



Stilo BL - 2x - sospensione

Cuore: de aluminio.
 Mantenimiento del flujo luminoso al 80%: 50000h (L80B20).
 Normativa: Productos con arreglo a las normas EN 60598-1-CEI 34.21, tienen el grado de protección según las normas EN 60529.

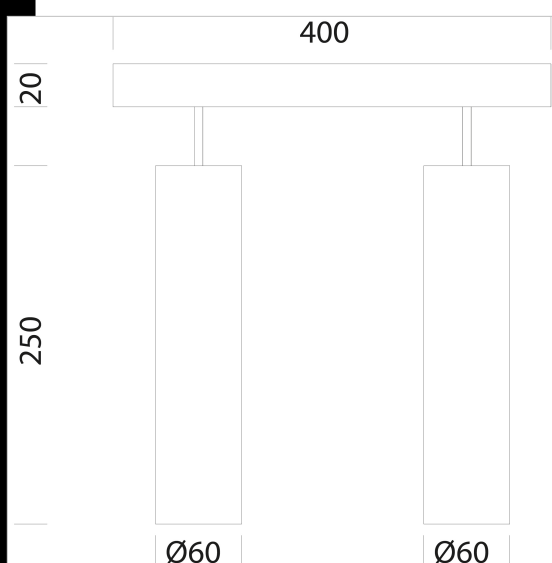

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22045310-00	CLD	0,60	LED2x-893lm-3000K-40°-CRI 90	20 W	BLANCO
22045330-00	CLD	1,87	LED2x-893lm-3000K-40°-CRI 90	20 W	NEGRO
22045360-00	CLD	0,60	LED2x-893lm-3000K-40°-CRI 90	20 W	CROMADO
22045110-00	CLD-DI	0,60	LED2x-893lm-3000K-40°-CRI 90	20 W	BLANCO
22045130-00	CLD-DI	0,60	LED2x-893lm-3000K-40°-CRI 90	20 W	NEGRO
22045160-00	CLD-DI	0,60	LED2x-893lm-3000K-40°-CRI 90	20 W	CROMADO
22045310-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	BLANCO
22045330-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	NEGRO
22045360-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	CROMADO
22045110-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	BLANCO
22045130-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	NEGRO
22045160-1241	CLD CELL-D-D	1,90	LED2x-893lm-3000K-40°-CRI 90	20 W	CROMADO
22045310-68	CLD CELL	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	BLANCO
22045330-68	CLD CELL	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	NEGRO
22045360-68	CLD CELL	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	CROMADO
22045110-1213	CLD CELL-DI	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	BLANCO
22045130-1213	CLD CELL-DI	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	NEGRO
22045160-1213	CLD CELL-DI	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	CROMADO
22045310-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	BLANCO
22045330-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	NEGRO
22045360-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	CROMADO
22045110-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	BLANCO
22045130-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	NEGRO
22045160-6841	CLD CELL-D-D	1,90	LED2x-956lm-4000K-40°-CRI 90	20 W	CROMADO

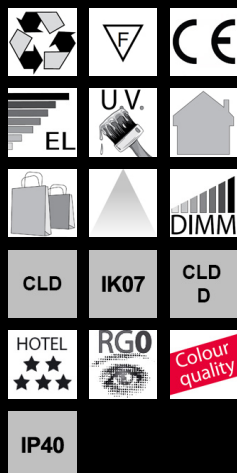

Download

DXF 2D
 - stilobl2.dxf

Montaggi
 - STILO_LED rev4.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated