



Stilo BL - 3x - suspensión

Cuerpo: de aluminio.
 Mantenimiento del flujo luminoso al 80%: 50000h (L80B20).
 Normativa: Productos con arreglo a las normas EN 60598-1-CEI 34.21, tienen el grado de protección según las normas EN 60529.

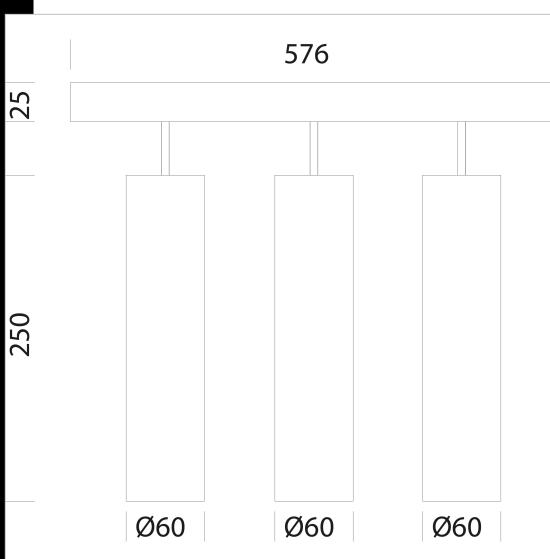

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22045510-00	CLD	0,75	LED3x-893lm-3000K-40°-CRI 90	30 W	BLANCO
22045530-00	CLD	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	NEGRO
22045560-00	CLD	2,95	LED3x-893lm-3000K-40°-CRI 90	36 W	CROMADO
22045410-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	30 W	BLANCO
22045430-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	NEGRO
22045460-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	CROMADO
22045510-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	BLANCO
22045530-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	NEGRO
22045560-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	CROMADO
22045410-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	BLANCO
22045430-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	NEGRO
22045460-1241	CLD CELL-D-D	2,95	LED3x-893lm-3000K-40°-CRI 90	30 W	CROMADO
22045510-68	CLD CELL	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	BLANCO
22045530-68	CLD CELL	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	NEGRO
22045560-68	CLD CELL	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMADO
22045410-1213	CLD CELL-DI	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	BLANCO
22045430-1213	CLD CELL-DI	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	NEGRO
22045460-1213	CLD CELL-DI	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMADO
22045510-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	BLANCO
22045530-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	NEGRO
22045560-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMADO
22045410-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	BLANCO
22045430-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	NEGRO
22045460-6841	CLD CELL-D-D	2,95	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMADO

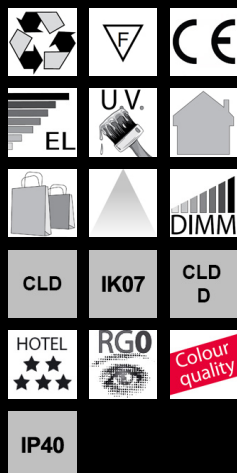

Download

DXF 2D
 - stilobl3.dxf

Montaggi
 - STILO_LED rev4.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated