


Stilo BC - 3x - suspensión

Cuerpo: de aluminio.
 Mantenimiento del flujo luminoso al 80%: 50000h (L80B20).
 Normativa: Productos con arreglo a las normas EN 60598-1-CEI 34.21, tienen el grado de protección según las normas EN 60529.

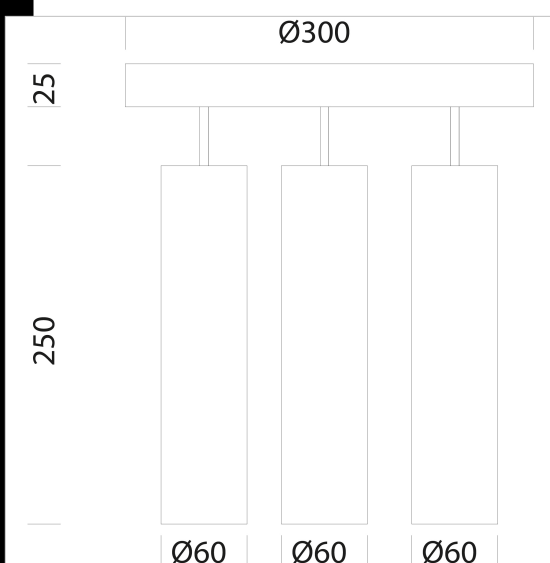

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22045910-00	CLD	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	BLANCO
22045930-00	CLD	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	NEGRO
22045960-00	CLD	3,04	LED3x-893lm-3000K-40°-CRI 90	36 W	CROMADO
22045810-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	BLANCO
22045830-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	NEGRO
22045860-00	CLD-DI	0,60	LED3x-893lm-3000K-40°-CRI 90	36 W	CROMADO
22045910-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	BLANCO
22045930-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	CROMADO
22045960-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	NEGRO
22045810-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	BLANCO
22045830-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	CROMADO
22045860-1241	CLD CELL-D-D	2,90	LED3x-893lm-3000K-40°-CRI 90	30 W	NEGRO
22045910-68	CLD CELL	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	BLANCO
22045930-68	CLD CELL	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMADO
22045960-68	CLD CELL	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	NEGRO
22045810-1213	CLD CELL-DI	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	BLANCO
22045830-1213	CLD CELL-DI	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMADO
22045860-1213	CLD CELL-DI	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	NEGRO
22045910-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	BLANCO
22045930-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMADO
22045960-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	NEGRO
22045810-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	BLANCO
22045830-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	CROMADO
22045860-6841	CLD CELL-D-D	2,90	LED3x-956lm-4000K-40°-CRI 90	30 W	NEGRO

Download

DXF 2D
 - stilobc3.dxf

Montaggi
 - STILO_LED rev4.pdf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated