


Download

DXF 2D
- anello.dxf



Anello

Cuerpo: en aluminio, completo con cable de alimentación DIMM.
Difusor: en policarbonato. LED: mantenimiento del flujo luminoso al 80%: 50.000h (L80B20).

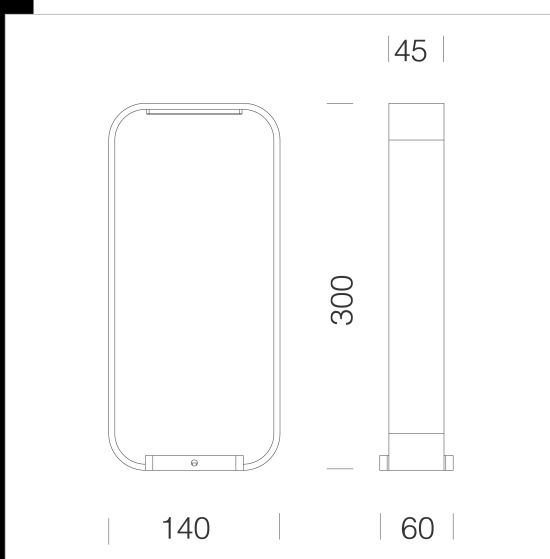

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22051110-00	CLD	1,00	LED-290lm-3000K-CRI>90	6 W	BLANCO
22051130-00	CLD	1,00	LED-290lm-3000K-CRI>90	6 W	NEGRO
22051170-00	CLD	1,00	LED-290lm-3000K-CRI>90	6 W	GRAFITO

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated