

Download


DXF 2D
- swing.dxf

Montaggi
- SWING rev2.pdf



Swing LED

Corpo: de alluminio ajustable con muelles.
Barnizado: Mediante polvo con barniz epoxipoliester resistente a los rayos UV.
Normativa: Fabricados en conformidad a las normas EN 60598-1 - CEI 34-21.
Poseen el grado de protección según las normas EN 60529.
Mantenimiento del flujo luminoso al 70% 25.000h L70B50
Factor de potencia: >= 0.8
Clase de seguridad fotobiológica Grupo exento EN62471
empotrado Ø 78/86mm

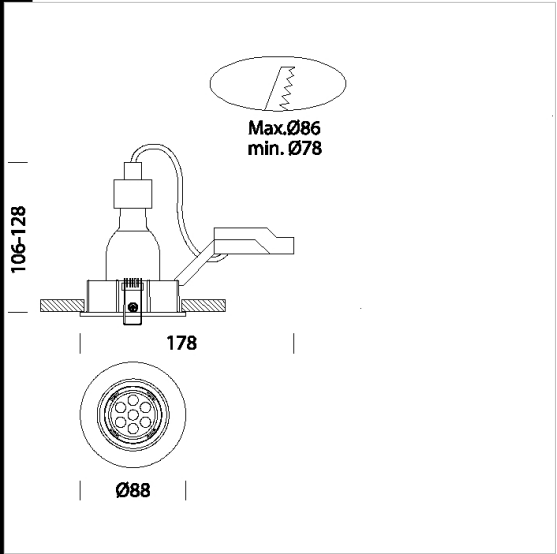

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22068210-00	CLD	0,25	LED SMD-500lm-3000K-38°-CRI 80	6 W	BLANCO
22068270-00	CLD	0,25	LED SMD-500lm-3000K-38°-CRI 80	6 W	BLANCO
22068215-00	CLD	0,24	LED SMD-535lm-4000K-38°-CRI 80	6 W	BLANCO
22068275-00	CLD	0,25	LED SMD-535lm-4000K-38°-CRI 80	6 W	BLANCO
22068211-00	CLD-DI	0,25	LED SMD-500lm-3000K-38°-CRI 80	6 W	BLANCO
22068271-00	CLD-DI	0,27	LED SMD-500lm-3000K-38°-CRI 80	6 W	BLANCO
22068217-00	CLD-DI	0,25	LED SMD-535lm-4000K-38°-CRI 80	6 W	BLANCO
22068277-00	CLD-DI	0,27	LED SMD-535lm-4000K-38°-CRI 80	6 W	BLANCO
22068214-00	CLD	0,70	LED SMD-800lm-3000K-38°-CRI 80	9 W	BLANCO
22068274-00	CLD	0,25	LED SMD-800lm-3000K-38°-CRI 80	9 W	BLANCO
22068216-00	CLD	0,23	LED SMD-856lm-4000K-38°-CRI 80	9 W	BLANCO
22068276-00	CLD	0,25	LED SMD-856lm-4000K-38°-CRI 80	9 W	BLANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated