

CLD

IP40



IK07

**Download**


DXF 2D  
- curve.dxf

Montaggi  
- CURVE\_RIFLESSO.pdf



**Curve**

Cuerpo: de aluminio barnizado, previsto para la instalación de pared. LED: mantenimiento del flujo luminoso al 70%: 36.000h (L70B50). Factor de potencia >0,9.

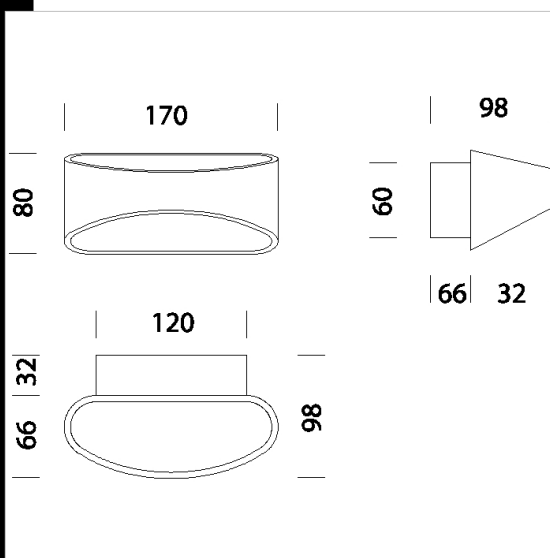

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22084811-00	CLD	0,60	LED white 6W-351lm-3000K-CRI>80	6 W	BLANCO

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated