





IP65


IK07

Download
DXF 2D
- casfos.dwg



Amplifier / DMX signal modulator Kit

Regenerador de señal DMX en caja estanca con alimentador 20W a 24V. Equipada con borne DMX de entrada y cuatro de salida. A utilizar tras el vigésimo acc. 92051 y tras el décimo KIT3.

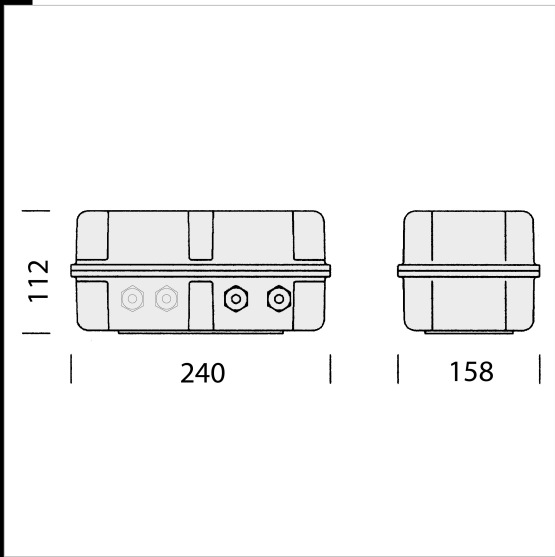

Code	Gear	Kg	WTot
22092052-00	CLD	1,40	0 W

Prodotti



- M45 LED FULLCOLOR RGB



- M60 LED FULLCOLOR RGB



- Q45 - LED FULLCOLOR RGB



- Minerva LED+RGBW



- Minerva LED + colour changing LED

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated