

## Office 1 Matt

Familia de aparatos estudiados para unir un elevado ahorro energético a una óptima calidad de luz emitida, para responder a las varias exigencias de seguridad y mantenimiento. El diseño del aparato es extremadamente simple y funcional. Fabricados en conformidad a las normas EN 12464 para video terminal

Cuerpo: De policarbonato irrompible y autoextinguible V2, estabilizado a los rayos UV, antiamarilleo.

Reflector: De policarbonato, autoextinguible V2, satin con polvos de aluminio, a alto vacío con procedimiento de C.V.D. para un mayor control y rendimiento de la luz.


Equipamiento: Incluyen resortes de acero inoxidable que brindan una adherencia perfecta al cielo raso de un espesor de 1 a 20 mm.

Normativa: Fabricados en conformidad a las normas EN 60598-1-CEI 34-21, tienen el grado de protección según las normas EN 60529.

Factor de potencia: >0,95

Mantenimiento del flujo luminoso al 80%: 50.000h (L80B20).

Clase de seguridad fotobiológica Grupo exento EN62471

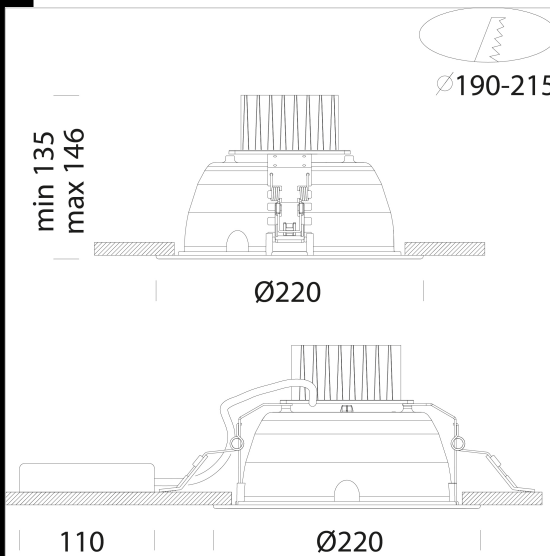

### Download

DXF 2D

- off12.dxf

Montaggi

- OFFICE\_1\_rev5.pdf

BIM

- Office 1 Matt - 20200714.zip

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152414-00	CLD CELL	1,10	LED COB-2488lm-4000K-CRI 92	19 W	PLATA
22152410-00	CLD CELL	1,10	LED COB-3172lm-4000K-CRI 92	25 W	PLATA
22152961-68	CLD CELL	1,10	LED COB-3479lm-4000K-CRI 92	32 W	PLATA
22152417-00	CLD CELL	1,25	LED COB-4804lm-4000K-CRI 92	39 W	PLATA
22152411-68	CLD CELL	0,95	LED COB-4230lm-4000K-CRI 92	39 W	PLATA
22152960-00	CLD CELL	1,90	LED COB-6734lm-4000K-CRI 92	69 W	PLATA
22152415-00	CLD CELL	1,10	LED COB-2197lm-3000K-CRI 92	18 W	PLATA
22152413-00	CLD CELL	1,10	LED COB-3084lm-3000K-CRI 92	26 W	PLATA
22152961-00	CLD CELL	1,60	LED 3000-3251lm-3000K-CRI 92	32 W	PLATA
22152416-00	CLD CELL	1,20	LED COB-4674lm-3000K-CRI 92	39 W	PLATA
22152411-00	CLD CELL	1,05	LED COB-3954lm-3000K-CRI 92	39 W	PLATA
22152960-39	CLD CELL	1,49	LED COB-6263lm-3000K-CRI 92	69 W	PLATA
22152412-00	CLD CELL	1,15	LED COB-3248lm-3500K-CRI 92	35 W	PLATA
22152414-1241	CLD CELL-D-D	1,10	LED COB-2488lm-4000K-CRI 92	19 W	PLATA
22152410-1241	CLD CELL-D-D	1,25	LED COB-3172lm-4000K-CRI 92	25 W	PLATA
22152961-6841	CLD CELL-D-D	1,63	LED COB-3479lm-4000K-CRI 92	32 W	PLATA
22152417-1241	CLD CELL-D-D	1,10	LED COB-4804lm-4000K-CRI 92	39 W	PLATA
22152411-6841	CLD CELL-D-D	1,10	LED COB-4230lm-4000K-CRI 92	39 W	PLATA
22152960-1241	CLD CELL-D-D	1,90	LED COB-6734lm-4000K-CRI 92	65 W	PLATA
22152415-1241	CLD CELL-D-D	1,15	LED COB-2197lm-3000K-CRI 93	19 W	PLATA
22152413-1241	CLD CELL-D-D	1,25	LED COB-3084lm-3000K-CRI 93	27 W	PLATA
22152961-1241	CLD CELL-D-D	1,25	LED COB-3251lm-3000K-CRI 92	32 W	PLATA
22152416-1241	CLD CELL-D-D	1,08	LED COB-4674lm-3000K-CRI 92	40 W	PLATA
22152411-1241	CLD CELL-D-D	1,45	LED COB-3954lm-3000K-CRI 92	40 W	PLATA
22152960-3941	CLD CELL-D-D	1,41	LED COB-6263lm-3000K-CRI 92	65 W	PLATA
22152412-1241	CLD CELL-D-D	1,25	LED COB-3248lm-3500K-CRI 92	35 W	PLATA
22152414-09	CLD CELL-E	1,10	LED COB-2488lm-4000K-CRI 92	19 W	PLATA
22152410-09	CLD CELL-E	1,60	LED COB-3172lm-4000K-CRI 92	25 W	PLATA
22152961-6809	CLD CELL-E	1,60	LED COB-3479lm-4000K-CRI 92	32 W	PLATA
22152417-09	CLD CELL-E	1,54	LED COB-4804lm-4000K-CRI 92	40 W	PLATA
22152411-6809	CLD CELL-E	1,45	LED COB-4230lm-4000K-CRI 92	39 W	PLATA
22152960-09	CLD CELL-E	1,60	LED COB-6734lm-4000K-CRI 92	69 W	PLATA

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

## Office 1 Matt

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152415-09	CLD CELL-E	1,45	LED COB-2197lm-3000K-CRI 92	18 W	PLATA
22152413-09	CLD CELL-E	1,45	LED COB-3084lm-3000K-CRI 92	26 W	PLATA
22152961-09	CLD CELL-E	1,45	LED COB-3251lm-3000K-CRI 92	32 W	PLATA
22152416-09	CLD CELL-E	1,45	LED COB-4674lm-3000K-CRI 92	40 W	PLATA
22152411-09	CLD CELL-E	1,60	LED COB-3954lm-3000K-CRI 92	40 W	PLATA
22152960-0928	CLD CELL-E	1,45	LED COB-6263lm-3000K-CRI 92	69 W	PLATA
22152412-09	CLD CELL-E	1,43	LED COB-3248lm-3500K-CRI 92	34 W	PLATA
22152414-31	CLD CELL-E	1,50	LED COB-2488lm-4000K-CRI 92	20 W	PLATA
22152410-31	CLD CELL-E	1,50	LED COB-3172lm-4000K-CRI 92	27 W	PLATA
22152961-3113	CLD CELL-E	1,50	LED COB-3479lm-4000K-CRI 92	32 W	PLATA
22152417-31	CLD CELL-E	1,50	LED COB-4804lm-4000K-CRI 92	40 W	PLATA
22152411-3113	CLD CELL-E	1,50	LED COB-4230lm-4000K-CRI 92	39 W	PLATA
22152960-31	CLD CELL-E	1,50	LED COB-6734lm-4000K-CRI 92	69 W	PLATA
22152415-31	CLD CELL-E	1,50	LED COB-2197lm-3000K-CRI 92	20 W	PLATA
22152413-31	CLD CELL-E	1,50	LED COB-3084lm-3000K-CRI 92	27 W	PLATA
22152961-31	CLD CELL-E	1,50	LED COB-3251lm-3000K-CRI 92	32 W	PLATA
22152416-31	CLD CELL-E	1,50	LED COB-4674lm-3000K-CRI 92	40 W	PLATA
22152411-31	CLD CELL-E	1,50	LED COB-3954lm-3000K-CRI 92	39 W	PLATA
22152960-3957	CLD CELL-E	2,19	LED COB-6263lm-3000K-CRI 92	69 W	PLATA
22152412-31	CLD CELL-E	1,50	LED COB-3248lm-3500K-CRI 92	35 W	PLATA

### Accessori



- Difusor - office 1



- Difusor - office 1



- Difusor - office 1



- Difusor - office 1



- Difusor - office 1



- Difusor - office 1



- Sensor de presencia y de luz

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated