

Office 2 Matt - UGR<19



Familia de aparatos estudiados para unir un elevado ahorro energético a una óptima calidad de luz emitida, para responder a las varias exigencias de seguridad y mantenimiento. El diseño del aparato es extremadamente simple y funcional. Fabricados en conformidad a las normas EN 12464 para video terminal

Cuerpo: De policarbonato irrompible y autoextinguible V2, estabilizado a los rayos UV, antiamarilleo.

Reflector: De policarbonato, autoextinguible V2, satin con polvos de aluminio, a alto vacío con procedimiento de C.V.D. para un mayor control y rendimiento de la luz.

Equipamiento: Incluyen resortes de acero inoxidable que brindan una adherencia perfecta al cielo raso de un espesor de 1 a 40 mm.


Normativa: Fabricados en conformidad a las normas EN 60598-1-CEI 34-21, tienen el grado de protección según las normas EN 60529.

LED: fuentes de luz de alta eficiencia DIMM 1/10V o DALI


Factor de potencia: >0,95

Mantenimiento del flujo luminoso al 80%: 50.000h (L80B20).

Clase de seguridad fotobiológica Grupo exento EN62471

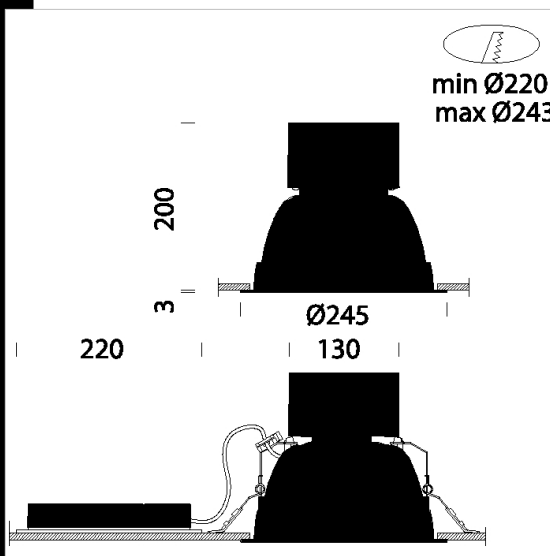

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152512-68	CLD CELL	1,11	LED COB-3193lm-4000K-CRI 92	26 W	PLATA
22152513-68	CLD CELL	1,12	LED COB-4831lm-4000K-CRI 92	39 W	PLATA
22152517-68	CLD CELL	1,05	LED COB-3193lm-4000K-CRI 92	28 W	PLATA
22152519-68	CLD CELL	1,50	LED COB-3614lm-4000K-CRI 92	34 W	PLATA
22152810-00	CLD CELL	2,30	LED COB-6925lm-4000K-CRI 92	69 W	PLATA
22152512-00	CLD CELL	1,20	LED COB-2984lm-3000K-CRI 92	26 W	PLATA
22152513-00	CLD CELL	1,40	LED COB-4515lm-3000K-CRI 92	39 W	PLATA
22152517-00	CLD CELL	1,04	LED COB-2984lm-3000K-CRI 92	26 W	PLATA
22152519-00	CLD CELL	1,50	LED COB-3378lm-3000K-CRI 92	34 W	PLATA
22152810-39	CLD CELL	1,57	LED COB-6440lm-3000K-CRI 92	69 W	PLATA
22152515-00	CLD CELL	1,35	LED COB-3248lm-3500K-CRI 92	35 W	PLATA
22152512-6841	CLD CELL-D-D	1,25	LED COB-3193lm-4000K-CRI 92	27 W	PLATA
22152513-6841	CLD CELL-D-D	1,40	LED COB-4831lm-4000K-CRI 92	40 W	PLATA
22152517-6841	CLD CELL-D-D	1,35	LED COB-3193lm-4000K-CRI 92	27 W	PLATA
22152519-6841	CLD CELL-D-D	1,40	LED COB-3614lm-4000K-CRI 92	34 W	PLATA
22152810-1241	CLD CELL-D-D	1,49	LED COB-6925lm-4000K-CRI 92	69 W	PLATA
22152512-1241	CLD CELL-D-D	1,25	LED COB-2984lm-3000K-CRI 93	27 W	PLATA
22152513-1241	CLD CELL-D-D	1,40	LED COB-4515lm-3000K-CRI 92	40 W	PLATA
22152817-1241	CLD CELL-D-D	1,40	LED COB-2984lm-3000K-CRI 92	27 W	PLATA
22152519-1241	CLD CELL-D-D	1,05	LED COB-3378lm-3000K-CRI 92	34 W	PLATA
22152810-3941	CLD CELL-D-D	1,48	LED COB-6440lm-3000K-CRI 92	69 W	PLATA
22152515-1241	CLD CELL-D-D	1,40	LED COB-3248lm-3500K-CRI 92	34 W	PLATA
22152512-6809	CLD CELL-E	1,48	LED COB-3193lm-4000K-CRI 92	27 W	PLATA
22152513-6809	CLD CELL-E	1,40	LED COB-4831lm-4000K-CRI 92	40 W	PLATA
22152517-6809	CLD CELL-E	1,41	LED COB-3193lm-4000K-CRI 92	26 W	PLATA
22152519-6809	CLD CELL-E	1,40	LED COB-3614lm-4000K-CRI 92	34 W	PLATA
22152810-09	CLD CELL-E	1,40	LED COB-6925lm-4000K-CRI 92	69 W	PLATA
22152517-09	CLD CELL-E	1,41	LED COB-2984lm-3000K-CRI 92	26 W	PLATA
22152512-09	CLD CELL-E	1,48	LED COB-2984lm-3000K-CRI 92	27 W	PLATA
22152513-09	CLD CELL-E	1,50	LED COB-4515lm-3000K-CRI 92	40 W	PLATA
22152519-09	CLD CELL-E	1,50	LED COB-3378lm-3000K-CRI 92	34 W	PLATA
22152810-0928	CLD CELL-E	1,50	LED COB-6440lm-3000K-CRI 92	69 W	PLATA

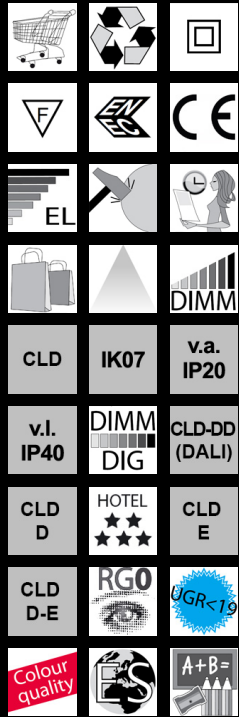

Download

DXF 2D
- off2matt2.dxf

Montaggi
- OFFICE 2 LED rev6.pdf

BIM
- Office 2 Matt - 20200714.zip

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Office 2 Matt - UGR<19

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22152515-09	CLD CELL-E	1,85	LED COB-3248lm-3500K-CRI 92	34 W	PLATA
22152513-3113	CLD CELL-E	1,50	LED COB-4831lm-4000K-CRI 92	40 W	PLATA
22152512-3113	CLD CELL-E	1,50	LED COB-3193lm-4000K-CRI 92	27 W	PLATA
22152517-3113	CLD CELL-E	1,50	LED COB-3193lm-4000K-CRI 92	27 W	PLATA
22152519-3113	CLD CELL-E	1,50	LED COB-3614lm-4000K-CRI 92	34 W	PLATA
22152810-31	CLD CELL-E	1,50	LED COB-6925lm-4000K-CRI 92	69 W	PLATA
22152512-31	CLD CELL-E	1,50	LED COB-2984lm-3000K-CRI 92	27 W	PLATA
22152513-31	CLD CELL-E	1,50	LED COB-4515lm-3000K-CRI 92	40 W	PLATA
22152517-31	CLD CELL-E	1,50	LED COB-2984lm-3000K-CRI 92	27 W	PLATA
22152519-31	CLD CELL-E	1,50	LED COB-3378lm-3000K-CRI 92	34 W	PLATA
22152810-3957	CLD CELL-E	1,50	LED COB-6440lm-3000K-CRI 92	69 W	PLATA
22152515-31	CLD CELL-E	1,50	LED COB-3248lm-3500K-CRI 92	35 W	PLATA
22152517-1241	CLD CELL-D-D	1,35	LED COB-2984lm-3000K-CRI 92	27 W	PLATA

Accessori

 - Pantalla Office 2/3/4/6/9 -
trasparente


- Pantalla Office 2/3/4/6/9 - opale



- Difusor - Office 2/3/4/6/9



- Difusor - office 2/3/4/6/9



- Difusor - office 2/3/4/6/9



- Sensor de presencia y de luz

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated