




**Download**

DXF 2D  
- cover2.dxf  
Montaggi  
- COVERLIGHT 1-2-3-4 rev0.pdf



**Cover light 2 - square**

Cuerpo: De aluminio extruido.  
Reflector: Orientable en lámina de policarbonato opal satinado  
LED: Factor de potencia  $\geq 0,95$   
Mantenimiento del flujo luminoso al 80%: >50.000h (L80B20)

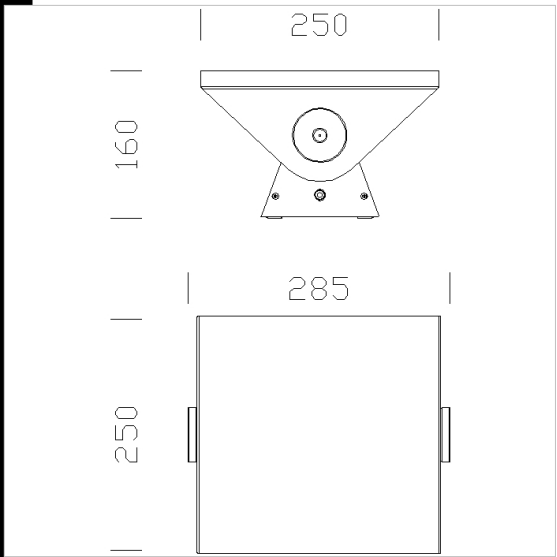

| Code        | Gear     | Kg   | Lumen Output-K-CRI     | WTot | Colour |
|-------------|----------|------|------------------------|------|--------|
| 22182111-00 | CLD CELL | 1,50 | LED-644lm-3000K-CRI 80 | 7 W  | BLANCO |
| 22182172-00 | CLD      | 1,50 | LED-644lm-3000K-CRI 80 | 10 W | PLATA  |

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated