




Download

DXF 2D
- cover4.dxf
Montaggi
- COVERLIGHT 1-2-3-4 rev0.pdf
BIM
- Cover light 4 LED - 20201005.zip



Cover light 4 LED

Cuerpo: De aluminio extruido.
Reflector: Orientable en lámina de policarbonato opal satinado
LED: Factor de potencia $\geq 0,95$
Mantenimiento del flujo luminoso al 80%: >50.000h (L80B20)

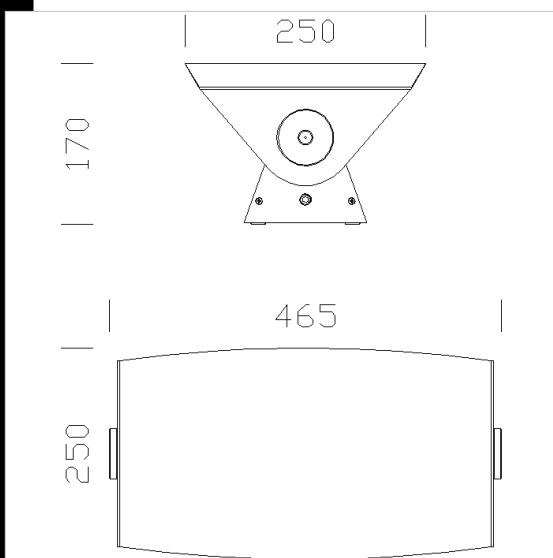

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22182274-00	CLD	1,47	LED-1134lm-3000K-CRI 80	15 W	PLATA

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated