



Download


DXF 2D
- pantecha.dxf

BIM
- PanelTech PUSH DALI - UGR19 - 20200224.zip



PanelTech - PUSH DALI - UGR<19

Marco: de aluminio. Placa interna: de PMMA. Difusor: extrudido de tecnopolímero prismático con alto cociente de transmisión. Normativa: fabricado conforme a las normas EN60598-1 CEI 34-21. Instalable en superficies normalmente inflamables. Factor de potencia: 0.95
Factor de deslumbramiento UGR: UGR<19
Mantenimiento del flujo luminoso al 80% 50000h L80B20
Clase de seguridad fotobiológica Grupo exento EN62471

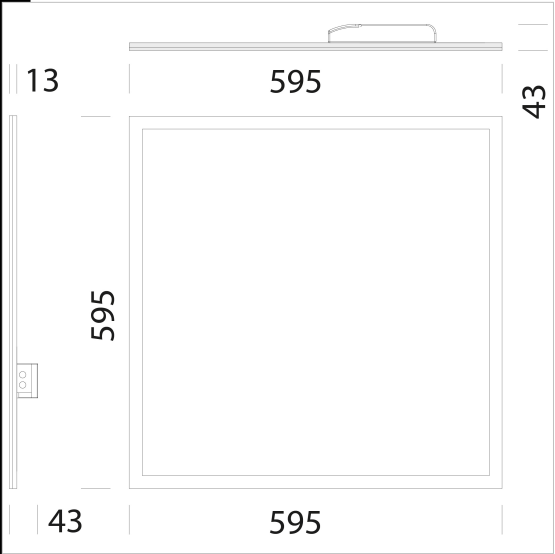

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22184810-1245	CLD-D-D	4,01	LED-3527lm-4000K-CRI 80	34 W	BLANCO
22184811-1245	CLD-D-D	4,05	LED-3353lm-3000K-CRI 80	34 W	BLANCO
22184810-0945	CLD CELL-E	4,30	LED-3527lm-4000K-CRI 80	35 W	BLANCO
22184811-0945	CLD CELL-E	4,30	LED-3353lm-3000K-CRI 80	35 W	BLANCO
22184810-3145	CLD CELL-D-D-E	3,22	LED-3527lm-4000K-CRI 80	35 W	BLANCO
22184811-3145	CLD CELL-E	4,60	LED-3353lm-3000K-CRI 80	35 W	BLANCO

Accessori



- Recessed springs



- Marco 600x600



- Marco - 600x600



- Marco - 600x600

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated