




Download

DXF 2D
- argon35.dxf
Montaggi
- Argon_rev1.pdf



3500 Argon 3.5

Cuerpo/Chasis: de aluminio inyectado fundido a presión con aletas de enfriamiento integradas en la cubierta.
Difusor: vidrio transparente esp. 4mm templado y resistente a los choques térmicos y a los golpes.
Dotación: con conector para una instalación rápida.
LED: factor de potencia: 0,9. Mantenimiento del flujo luminoso al 80%: 50.000h (L80B20).
Clasificación de riesgo fotobiológico: grupo exento.

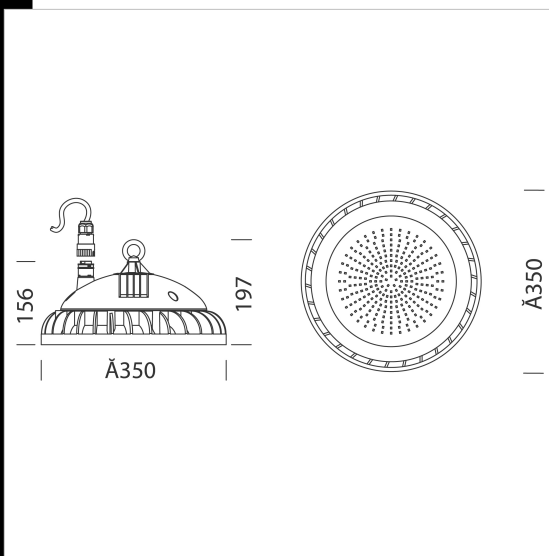

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22350030-00	CLD CELL	6,40	LED-13000lm-4000K-CRI 80	100 W	GRAFITO
22350031-00	CLD CELL	6,35	LED-19500lm-4000K-CRI 80	150 W	GRAFITO
22350032-00	CLD CELL	6,79	LED-26000lm-4000K-CRI 80	200 W	GRAFITO
22350030-0034	CLD CELL	8,10	LED-13000lm-5000K-CRI 80	100 W	GRAFITO
22350031-0034	CLD CELL	6,26	LED-19500lm-5000K-CRI 80	150 W	GRAFITO
22350032-0034	CLD CELL	6,69	LED-26000lm-5000K-CRI 80	200 W	GRAFITO

Accessori



- Bracket - Argon 3.5



- Reflector UGR<25 - Argon 3.5



- Bracket with EM box 1h - Argon 3.5

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated