


Download

DXF 2D
- sevilla3.dxf
Montaggi
- sevilla123.pdf



Sevilla 3 - 220/240V

Cuerpo / Marco: en aluminio fundido a presión. Difusor: en vidrio templado th. Resistente de 4 mm a choques térmicos e impactos. Equipamiento: completo con soporte galvanizado y pintado, con cable eléctrico L = 0.6m. LED: factor de potencia: 0.9. Mantenimiento del flujo luminoso al 80%: 50.000 h (L80B20). Clasificación de riesgo fotobiológico: grupo exento

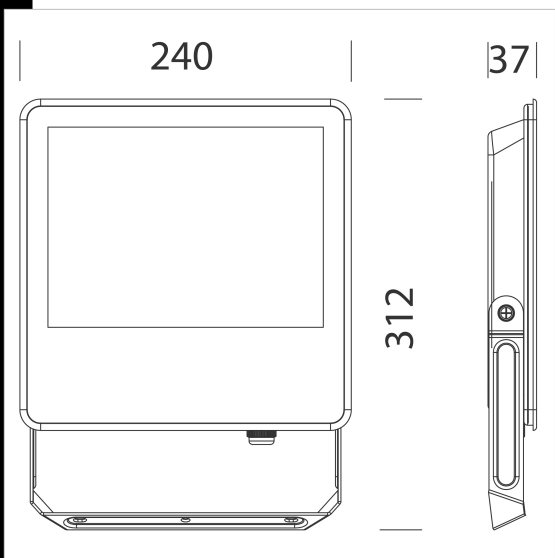

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22413531-00	CLD	1,28	LED-9200-3000K-CRI 80	90 W	GRAFITO
22413532-00	CLD	1,29	LED-9900-4000K-CRI 80	90 W	GRAFITO
22413533-00	CLD	1,29	LED-9900-6500K-CRI 80	90 W	GRAFITO
22413531-19	CLD	1,28	LED-9200-3000K-CRI 80	90 W	GRAFITO
22413532-19	CLD	1,29	LED-9900-4000K-CRI 80	90 W	GRAFITO
22413533-19	CLD	1,29	LED-9900-6500K-CRI 80	90 W	GRAFITO

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated