




Vision 2.0 small - Tiges - corto - adaptador universal


Cuerpo: De aluminio fundido a presión con orificios de enfriamiento.
Reflector: de aluminio fundido a presión, de alta eficiencia y anti-reflejo.
Barnizado: Mediante polvo con barniz epoxipoliéster resistente a los rayos UV.
Normativa: Fabricados en conformidad a las normas EN 60598-1 - CEI 34-21.
Poseen el grado de protección según las normas EN 60529.
Mantenimiento del flujo luminoso al 80%: 50.000h (L80B20).
Factor de potencia >0,95
Clase de seguridad fotobiológica Grupo exento EN62471
design: A.Pedretti (Studio Rota & partner)
Versión regulable DALI -1241 -6841 para usar con el carril OMNITRACK PLUS.

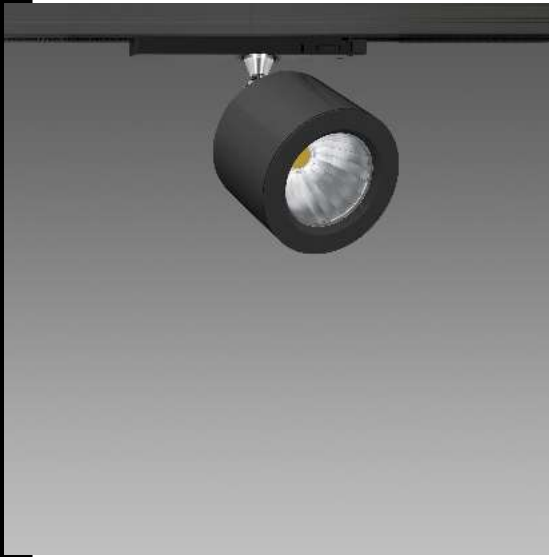

Download

DXF 2D
- 703810.dxf

Montaggi
- VISION 2.0 rev8.pdf

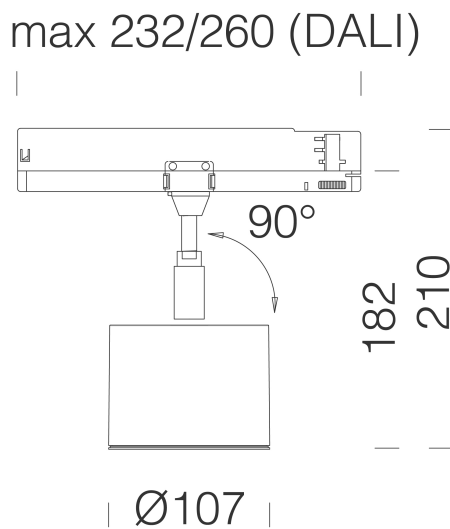

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
22703810-00	CLD	0,69	LED COB-3631lm-3000K-44°-CRI>90	33 W	BLANCO
22703830-00	CLD	0,69	LED COB-3631lm-3000K-44°-CRI>90	33 W	NEGRO
22703870-00	CLD	1,00	LED COB-3631lm-3000K-44°-CRI>90	33 W	PLATA
22703810-68	CLD	0,90	LED COB-3885lm-4000K-44°-CRI>90	33 W	BLANCO
22703830-68	CLD	0,69	LED COB-3885lm-4000K-44°-CRI>90	33 W	NEGRO
22703870-68	CLD	1,00	LED COB-3885lm-4000K-44°-CRI>90	33 W	PLATA

Accessori



- Pantalla alveolar



- Acc. para empotrada



- Acc. base para adaptadores universal y DIMM 1/10V-DALI

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W_{tot} column indicates the total wattage absorbed by the system without exceeding 10% of the indicated