


1490 Columna Liberty

Columna Liberty con uno o dos brazos. Columna interior de acero con revestimiento de aluminio inyectado fundido a presión. Con tapa de inspección de aluminio inyectado fundido a presión. Con 3 portafusibles de protección, 2 fusibles de 16A, bornera de 4 polos y 16 mm² de sección.

NOTA. La posibilidad de acoplar una composición a la columna está subordinada a la comprobación de la resistencia al empuje del viento, con arreglo a las normas y Decretos en vigor en el país de instalación de la columna, según los supuestos de carga previstos por la Norma EN 40-3-1.

Download

- DXF 2D
- liberty.dxf
- 3DS
- disano_1498_liberty_1_arm.3ds
- disano_1498_liberty_2_arms.3ds
- 3DM
- disano_1498_liberty_2_arms.3dm
- disano_1498_liberty_1_arm.3dm
- Montaggi
- 1498 12-08.pdf

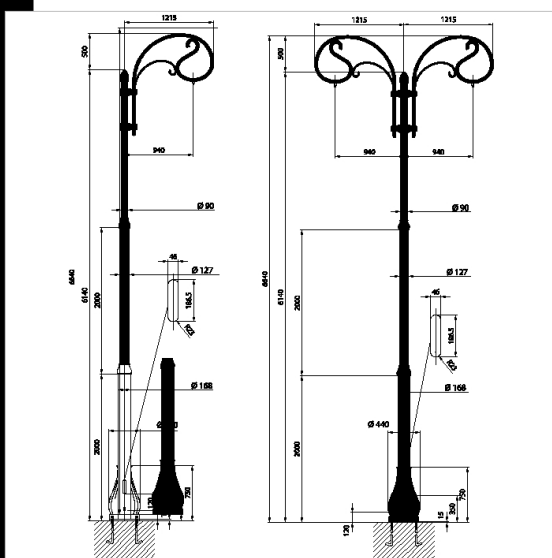

Code	Kg	Colour	Dimension	Aboveground	Underground
425200-00	0,00	GRAFITO	0x0x6140 ø440	6140	
425202-00	0,00	GRAFITO	0x0x6140 ø440	6140	

Accessori



- 297 Log-Bolts



- 296 log-bolts - France only

Prodotti



- 3203 Lucerna Q3 con diffusor



- 3210 Lucerna R1



- 3200 Lucerna Q1



- 3142 Campana LED



- 3206 Lucerna Q6 LED



- 3216 Lucerna R6 LED



- 3141 Campana LED

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated