

## 1421 poste para enterrar

Columna de acero galvanizado y barnizado con polvo de poliéster termoendurecible.

Base, tapa de registro y decoraciones moldeados de aluminio inyectado fundido a presión y sucesivamente barnizados.

Con tapa de inspección, con 2 portafusibles de protección, 2 fusibles de 10<sup>º</sup>, bornera extraíble.

Tornillos de acero inoxidable

Dimensiones de la zapata de cimentación de cemento (sujeto a las variaciones del terreno)

NOTA. La posibilidad de acoplar una composición a la columna está subordinada a la comprobación de la resistencia al empuje del viento, con arreglo a las normas y Decretos en vigor en el país de instalación de la columna, según los supuestos de carga previstos por la Norma EN 40-3-1.

### Download

DXF 2D

- 1421.dxf

3DS

- disano\_1421\_lucerna\_4mt\_simple.3ds

- disano\_1421\_lucerna\_4mt.3ds

- disano\_1421\_lucerna\_5mt.3ds

- disano\_1421\_lucerna\_5mt\_simple.3ds

3DM

- disano\_1421\_lucerna\_5mt.3dm


- disano\_1421\_lucerna\_4mt\_simple.3d

- disano\_1421\_lucerna\_5mt\_simple.3d

- disano\_1421\_lucerna\_4mt.3dm

Montaggi

- 1410-1411-1420-1421 03-11.pdf

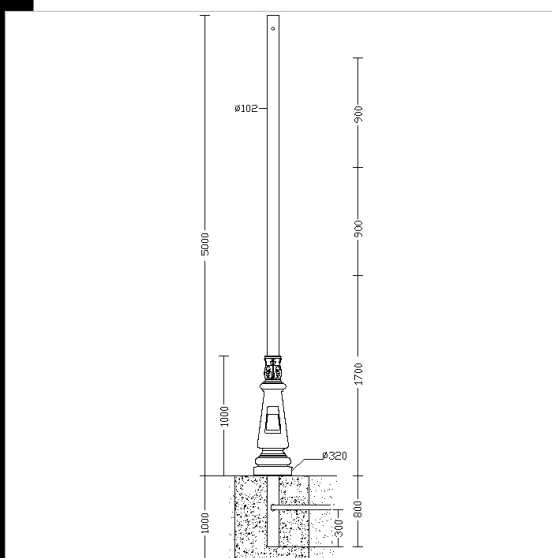

Code	Kg	Colour	Dimension	Aboveground	Underground
425330-00	0,00	ANTRACITA	4800x0x0 Ø0	4000	800
425331-00	0,00	BLANCO	5800x0x0 Ø0	5000	800

### Accessori



- 514 Brazo



- 515 Conexión para brazo



- 516 tapa



- 517 acoplamiento central



- 528 Racor 60mm

### Prodotti



- 3203 Lucerna Q3 con diffusor



- 3210 Lucerna R1



- 3213 Lucerna R3 con diffusor



- 3212 Lucerna R LED



- 3200 Lucerna Q1



- 3209 Lucerna Q8 LED



- 3214 Lucerna LED



- 3202 Lucerna Q2 LED COB

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated