

IK08

**Download**


DXF 2D  
- 1350n.dxf

Montaggi  
- 1313-1320-1350-1355-1356-1357  
02-18.pdf



**1350 sferico**

Globo: esférico de policarbonato irrompible y autoextinguible V2.  
Base: de nilón f.v., negro.  
Portalámparas: de cerámica ya cableado con cables de silicona y conectado al borne fijado en la base. Casquillo E27.  
Montaje: en la columna o en el brazo con conexión de diám. 60 mm.  
Equipamiento: tornillos de acero antiagarrotamiento con tuerca de acero introducida en el cuerpo de la base, para una mayor resistencia mecánica.

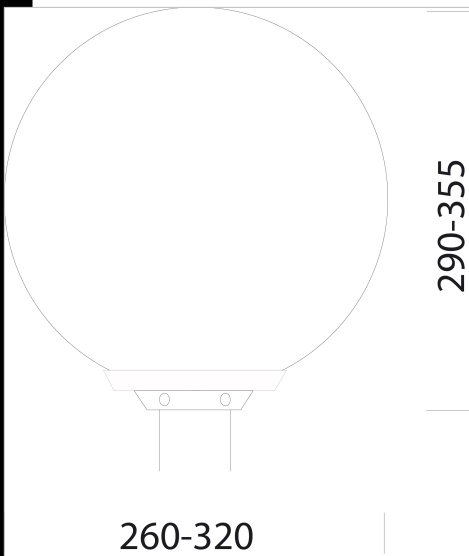

Code	Gear	Kg	Lumen-K-CRI	WTot	Base	Colour
426705-00	S	1,10	MAX 60---	60 W	E27	ÓPALO
426700-00	S	0,80	MAX 40---	40 W	E27	TRANSPARENTE
426704-00	S	1,10	MAX 60---	60 W	E27	TRANSPARENTE
426701-00	S	0,82	MAX 40---	40 W	E27	ÓPALO

**Accessori**



- 1377 braccio nilón



- 1373 braccio curvo



- 1370 braccio

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated