

1473 brazo curvo

De acerotropicalizado. Para la aplicacin sobre columna o a la pared. Usar con el art.1555 Brera y l'art. 1559.

Download

DXF 2D



- 1473.dxf

3DS

- disano_1473.3ds

3DM

- disano_1473.3dm

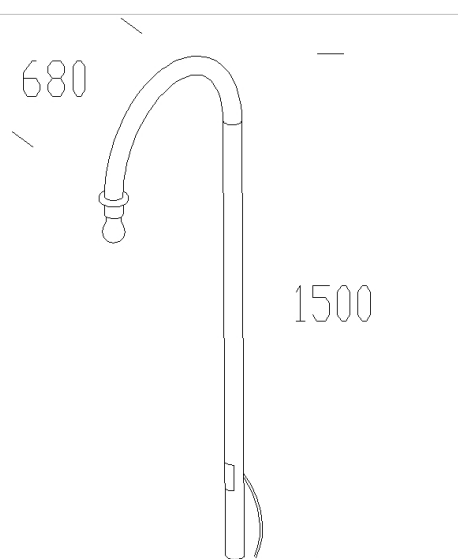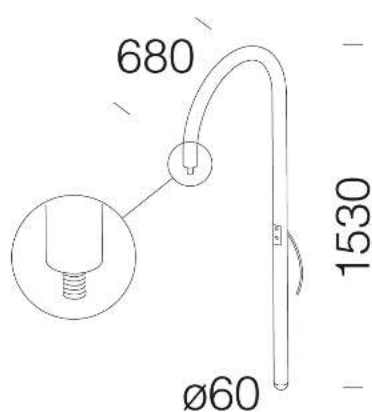

Code	Kg	WTot	Colour
426915-00	6,80	0 W	NEGRO
426921-00	6,80	0 W	GREY9007

Pali



- 1508 columna rayada ø120



- 1509 columna rayada ø120



- 1491 poste para enterrar



- 1493 poste con base

Prodotti



- 1765 Lanterna 1



- 1760 Lanterna 1 - Con rejilla



- 3124 Ghost - luz directa/indirecta



- 1762 Lanterna 1



- 3172 Montecarlo



- 3174 Montecarlo con vetro



- 3136 Campana



- 3137 Campana



- 3132 Tex haz ancho



- 1763 Lanterna 1 - luz indirecta



- 3114 Ghost - luz directa/indirecta



- 3188 Sforza Ø600 centro de la vía



- 3183 Sforza Ø500



- 3186 Sforza Ø500 centro de la vía



- 3171 Montecarlo - asimétrico



- 3175 Montecarlo LED - extensivo - elliptical lenses



- 1517 Clima LED



- 3224 Sforza LED extensivo



- 3142 Campana LED



- 1518 Clima LED contra la contaminación lumínica

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

1473 braccio curvo

Prodotti



- 3226 Sforza LED centro de la via



- 1512 Bastia - LED



- 3227 Sforza LED



- 3141 Campana LED



- 3301 Visconti 2 - Con cristal



- 3307 Visconti 8 LED - Alumbrado publico



- 3310 Visconti 11 LED



- 3146 Campana LED



- 1764 Lanterna 1 - luz indirecta con cristal

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated