
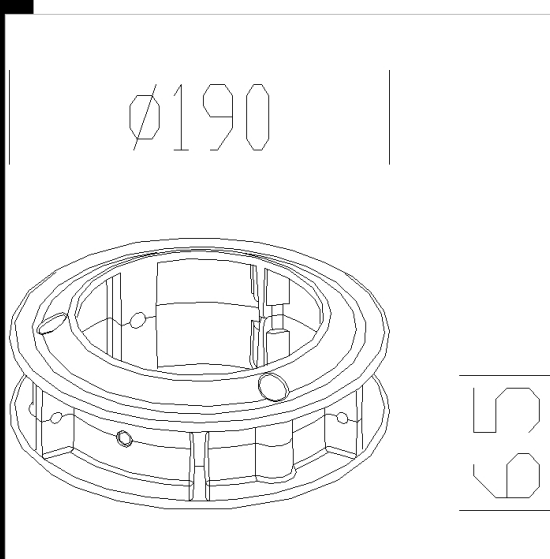


212 Anello giunzione

Utilizar con el acc. 213/214

Download

DXF 2D
- acc_212.dxf
3DS
- disano_212.3ds
3DM
- disano_212.3dm



Code	Kg	WTot	Colour
426954-00	0,93	0 W	GREY9007
426955-00	0,93	0 W	GRAFITO

Prodotti

	- 1751 Metropolis intensivo		- 1597 Vista - Con rejilla		- 3131 Tex medium haz		- 1581 Volo - Street optic
	- 1599 Vista		- 1582 Volo - estensivo		- 3124 Ghost - luz directa/indirecta		- 1502 Polar
	- 1572 Volo para vias de bicicletas		- 1580 Volo - asimétrico		- 1595 Vista - pantalla opal		- 1752 Metropolis estensivo
	- 1214 Clima		- 3114 Ghost - luz directa/indirecta		- 1598 Vista - luz indirecta		- 1504 Clima
	- 1756 Monza HP - high performance		- 1753 Metropolis para vias de bicicletas		- 1514 Clima per zona 1		- 1598 Vista - para Zona 1
	- 3182 Sforza Ø500 - pasos de peatones izquierdo		- 3184 Sforza Ø500 - pasos de peatones derecho		- 3175 Montecarlo LED - estensivo - elliptical lenses		- 1573 Volo LED haz ancho

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

212 Anello giunzione

Prodotti



- 1593 Volo LED - para vías de bicicletas



- 1202 Polar



- 1750 Metropolis



- 3189 Sforza Ø500



- 1756 Monza FX



- 1204 Clima

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated