
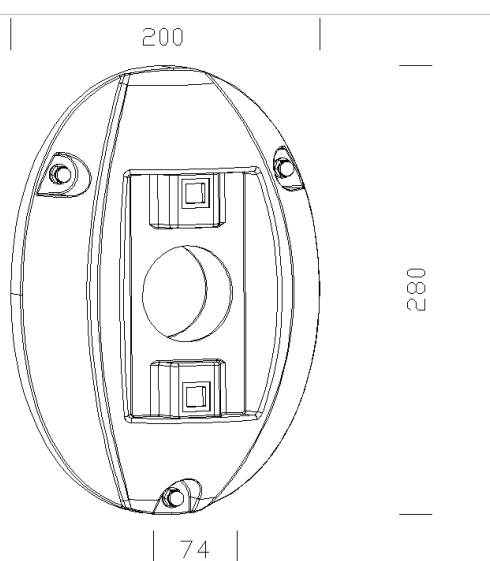


302 conexión a la pared

De aluminio. Para la instalacin a la pared del brazo acc. 210/301

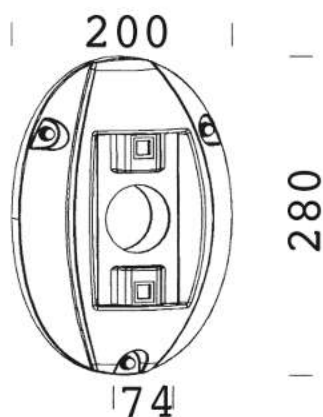

Code	Kg	WTot	Colour
426974-00	1,75	0 W	GREY9007
426975-00	1,56	0 W	GRAFITO

Prodotti



- 1765 Lanterna 1



- 1760 Lanterna 1 - Con rejilla



- 1751 Metropolis intensivo



- 1597 Vista - Con rejilla



- 1581 Volo - Street optic



- 1599 Vista



- 1582 Volo - estensivo



- 1762 Lanterna 1



- 1511 Torcia contra la
contaminación luminica



- 3165 Iride - luz directa



- 1511 Torcia



- 1599 Vista contra la
contaminación luminica



- 3172 Montecarlo



- 3136 Campana



- 3137 Campana



- 1770 Lanterna 2 - Con rejilla



- 1502 Polar



- 1572 Volo para vias de
bicicletas



- 1580 Volo - asimétrico



- 1755 Monza - con cristal plano



- 3160 Iride direct light - street
type



- 1763 Lanterna 1 - luz indirecta



- 1595 Vista - pantalla opal



- 1752 Metropolis extensivo

Download

DXF 2D

- acc 302.dxf

3DS

- disano_302.3ds

3DM

- disano_302.3dm

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

302 conexión a la pared

Prodotti

	- 3164 Iride - luz directa extensiva		- 1214 Clima		- 1598 Vista - luz indirecta		- 1771 Lanterna 2 - con difusor
	- 1504 Clima		- 1513 Torcia LED COB		- 1766 Lanterna LED		- 1753 Metropolis para vias de bicicletas
	- 3162 Iride - luz directa		- 1514 Clima per zona 1		- 3171 Montecarlo - asimétrico		- 1598 Vista - para Zona 1
	- 3167 Iride - luz directa LED		- 3175 Montecarlo LED - extensivo - elliptical lenses		- 1573 Volo LED haz ancho		- 1593 Volo LED - para vias de bicicletas
	- 1517 Clima LED		- 3223 Sforza LED asimétrico		- 3142 Campana LED		- 1518 Clima LED contra la contaminación lumínica
	- 1202 Polar		- 1512 Bastia - LED		- 1750 Metropolis		- 3166 Iride dir/ind LED RGB
	- 3141 Campana LED		- 3752 Metropolis - LED		- 3751 Metropolis - LED -		- 3146 Campana LED
	- 1204 Clima		- 1764 Lanterna 1 - luz indirecta				

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated