


Download

DXF 2D
- d1364.dxf
3DS
- disano_1364.3ds
3DM
- disano_1364.3dm



1364 Corona Ø100

In die-cast aluminium, black epoxy cationic electrocoating. Used to attach Corona Ø100 accessories to acc. 1408/1409 poles. For up to 6 arms acc 1362 or 1363. Equipped with terminal block. To be used with arms acc. 1373.

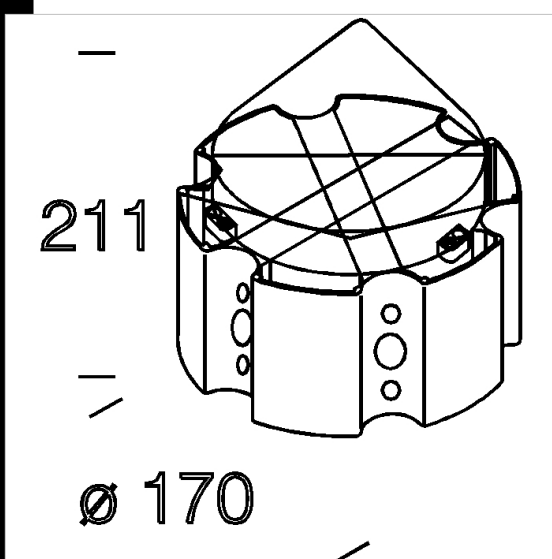

Code	Kg	WTot	Colour
426988-00	1,63	0 W	GREY9007
426981-00	0,88	0 W	NEGRO

Pali



- 1408 columna rayada Ø100 con



- 1409 columna rayada Ø100

Prodotti



- 1203 Kenia



- 3124 Ghost - luz directa/indirecta



- 3172 Montecarlo



- 3174 Montecarlo con vetro



- 1502 Polar



- 1214 Clima



- 3114 Ghost - luz directa/indirecta



- 1504 Clima



- 1514 Clima per zona 1



- 3171 Montecarlo - asimétrico



- 3175 Montecarlo LED - extensivo - elliptical lenses



- 1517 Clima LED



- 1518 Clima LED contra la contaminación lumínica



- 1202 Polar



- 1335 Globo LED contra la contaminación lumínica



- 1512 Bastia - LED



- 1221 Bastia



- 1204 Clima

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated