


Download

DXF 2D
 - d1365.dxf
 3DS
 - disano_1365.3ds
 3DM
 - disano_1365.3dm


1365 brida ø100

In die-cast aluminium, cationic electrocoating. To reinforce the structure, complete with 6 arm stop sections. To be mounted on 1408/1409 poles. To be used with arms acc. 1373.

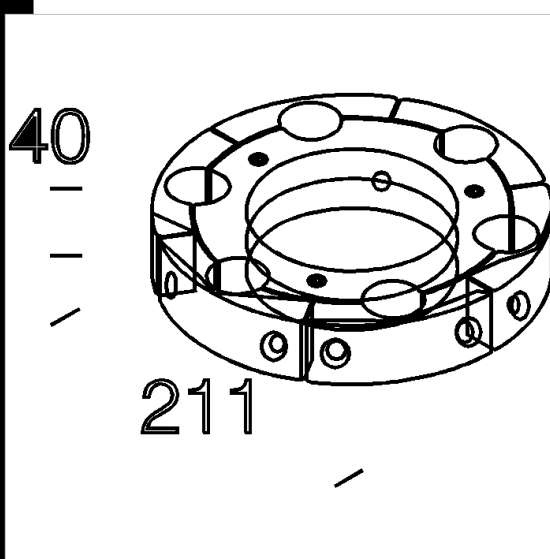

Code	Kg	WTot	Colour
426989-00	0,42	0 W	GREY9007
426982-00	0,42	0 W	NEGRO

Pali


- 1408 columna rayada ø100 con



- 1409 columna rayada ø100

Prodotti


- 1203 Kenia



- 3124 Ghost - luz directa/indirecta



- 3172 Montecarlo



- 3174 Montecarlo con vetro



- 1502 Polar



- 1320 Base grande



- 1214 Clima



- 3114 Ghost - luz directa/indirecta



- 1313 Base aluminio - cableado CNRL



- 1313 Base aluminio - cableado S/CNR



- 1504 Clima



- 1514 Clima per zona 1



- 3171 Montecarlo - asimétrico



- 3175 Montecarlo LED - extensivo - elliptical lenses



- 1517 Clima LED



- 1518 Clima LED contra la contaminación luminica



- 1202 Polar



- 1335 Globo LED contra la contaminación luminica



- 1512 Bastia - LED



- 1221 Bastia

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

1365 brida Ø100

Prodotti



- 1204 Clima

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated