

Download


DXF 2D
- 1675b.dxf

Montaggi
- spy 07-20.pdf



1675 Spy

Cuero: de aluminio inyectado fundido a presión. Cableado: con alimentador incorporado. LED: Mantenimiento del flujo luminoso al 70%: 25.000h (L70B50).

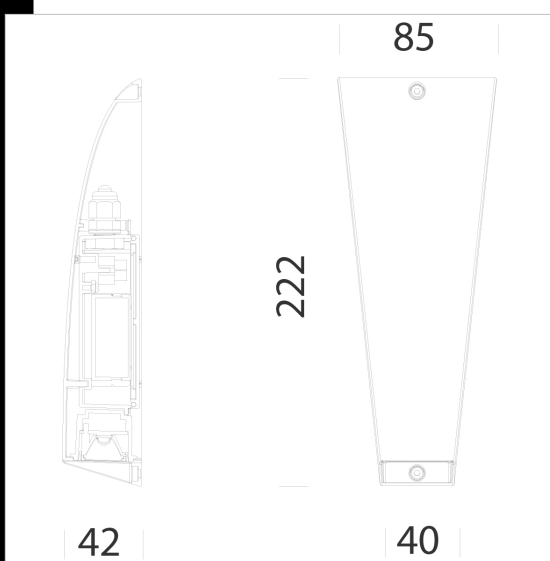

Code	Gear	Kg	Lumen Output-K-CRI	WTot	Colour
530672-00	CLD	0,31	LED-150lm-4000K-10°-CRI 80	2 W	GREY9007

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated