


31 caja IP65

Cajetn estanco IP65 que se suministra con balasto y mdulo de control. Utilizar una para mx. 5 Microfloor RGB/ Fullcolor; 7W/canal. Posibilidad de conexin para mx. 19 Slave

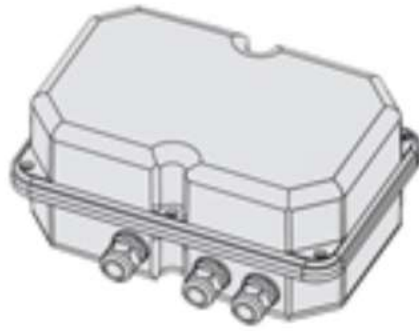

Download

Montaggi  
- acc\_61.pdf

| Code      | Gear | Kg   | Lumen-K-CRI   | WTot | Colour |
|-----------|------|------|---------------|------|--------|
| 986512-00 | CLD  | 2,21 | 7w/channel--- | 0 W  | NEGRO  |

Prodotti



- 1635 Microfloor LED RGB



- 1871 Midifloor LED fullcolor -

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated