



151 Cubo Lione

De aluminio fundido apresin. A utilizar para instalar los productos al poste.



Download

- DXF 2D
- 151.dxf
- 3DS
- disano_151_lione.3ds
- 3DM
- disano_151_lione.3dm
- Montaggi
- acc_151.pdf

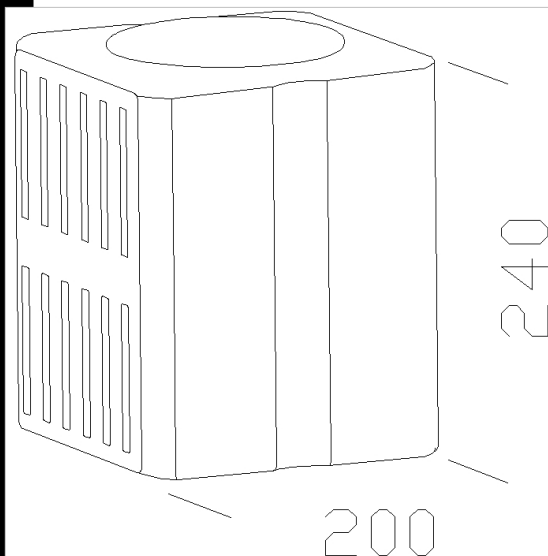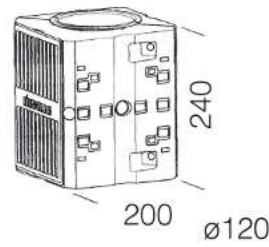

Code	Kg	WTot	Colour
991365-00	4,49	0 W	GREY9007

Pali



- 1508 columna rayada ø120



- 1509 columna rayada ø120



- 1491 poste para enterrar



- 1493 poste con base

Prodotti



- 1751 Metropolis intensivo



- 1597 Vista - Con rejilla



- 3131 Tex medium haz



- 1581 Volo - Street optic



- 1582 Volo - extensivo



- 1502 Polar



- 1572 Volo para vias de bicicletas



- 1580 Volo - asimétrico



- 3132 Tex haz ancho



- 1595 Vista - pantalla opal



- 1752 Metropolis extensivo



- 1214 Clima



- 1598 Vista - luz indirecta



- 1504 Clima



- 1240 Torpedo



- 3134 Tex - LED



- 1753 Metropolis para vias de bicicletas



- 1504 Clima



- 1593 Volo LED - para vias de bicicletas

The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

Prodotti



- 1202 Polar



- 1750 Metropolis



- 1204 Clima

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated