
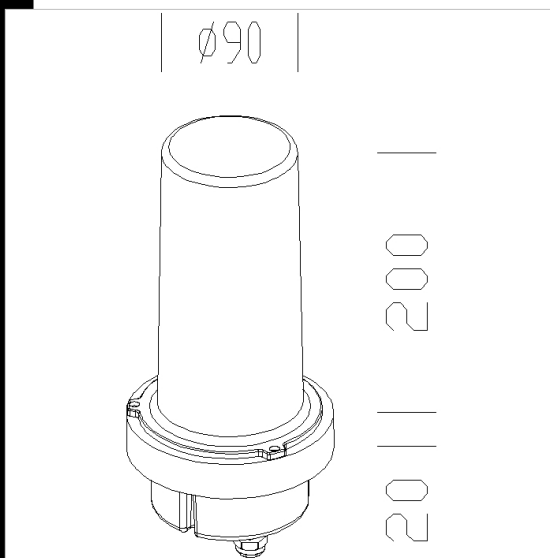


450 LED post top

Acoplamiento de aluminio fundido a presin. Para instalar para acabado esttico sobre columna.

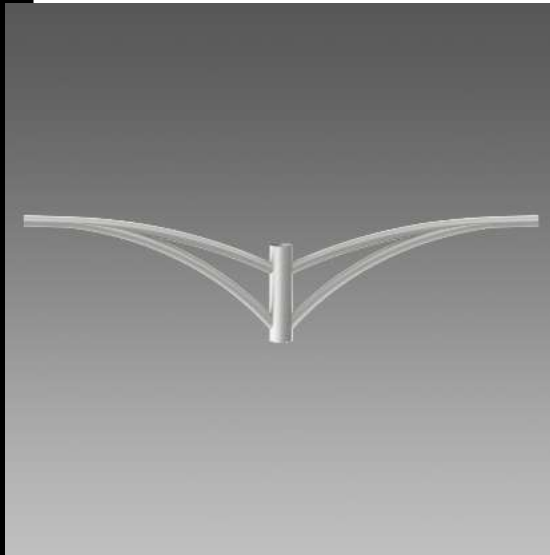

Code	Gear	Kg	Lumen-K-CRI	WTot	Colour
991395-00	CLD CELL	1,30	LED---	0 W	GRIS
991395-71	CLD CELL	0,52	LED blue---	0 W	GRIS

Pall



- 1476 columna "Aliante"



- 1475 columna "Aliante" para



- 1416 poste para enterrar ø159



- 1415 poste con base ø159

Prodotti



- 3172 Montecarlo



- 3174 Montecarlo con vetro



- 1755 Monza - con cristal plano



- 3160 Iride direct light - street type



- 3164 Iride - luz directa extensiva



- 3162 Iride - luz directa



- 3171 Montecarlo - asimétrico

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated