
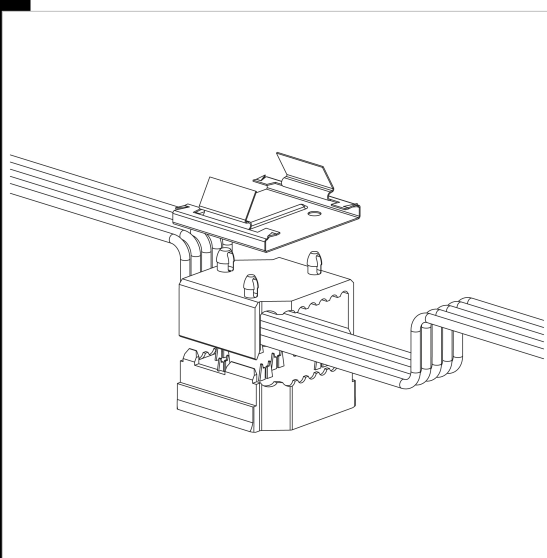


6620 sezionatore

Debe utilizarse para instalar una luminaria adicional al canal electrificado art.
 6001/6002/6003.
 994030-00 5 polos
 994031-00 7 polos
 994031-00001185 11 polos

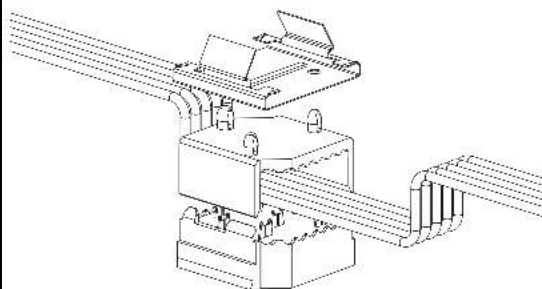

Code	Kg	WTot	Colour
994030-00	0,01	0 W	BLANCO
994031-00	0,01	0 W	BLANCO
994031-00001185	0,01	0 W	BLANCO

Prodotti

	- 6600 Techno System -		- 6601 Techno System -		- 6602 Techno System - bi-		- 6603 Techno System - elíptico
	- 6604 Techno System - extensivo 60° - CRI 90		- 6605 Techno System - extensivo difusor semiesférico - CRI 90		- 6600 Techno System - simétrico 90° - CRI 80		- 6601 Techno System - asimétrico 25° - CRI 80
	- 6602 Techno System - bi- asimétrico 25° - CRI 80		- 6603 Techno System - elíptico 30°x80° - CRI 80		- 6606 Techno System HE - UGR - CRI 80		- 6611 Techno System HE - simétrico 90° - CRI 80
	- 6615 Techno System HE - extensivo 60° - CRI 80		- 6614 Techno System HE - elíptico 30°x80° - CRI 80		- 6612 Techno System HE - asimétrico 25° - CRI 80		- 6613 Techno System HE - bi- asimétrico 25° - CRI 80
	- 6616 Techno System HE - extensivo difusor semiesférico - CRI 80		- 6617 Techno System HE - 90° Opal symmetric - CRI 80				

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated