
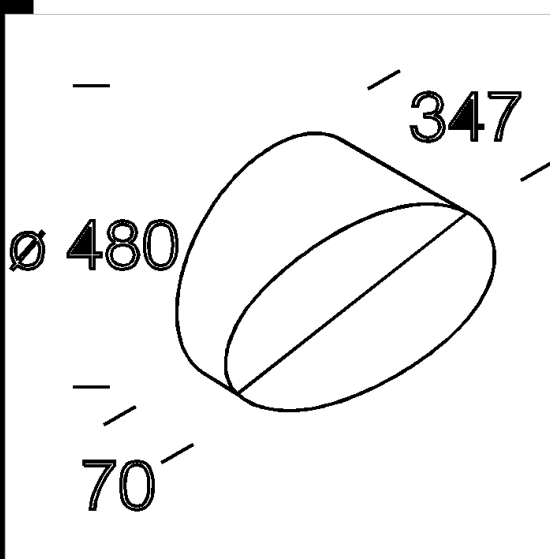


112 difusor

De acero, barnizado por cataforesis epoxídica. Permite dirigir el haz a una sola direccin. Puede usarse con el acc. 111.

Download

DXF 2D  
- d112.dxf

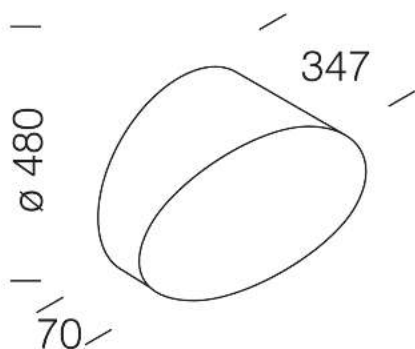

Code	Kg	WTot
995725-00	0,71	0 W

Prodotti



- 1156 Forum - FL



- 1156 Forum - FM



- 1156 Forum - FS



- 1156 Forum - XL



- 1156 Forum - XS



- 1156 Forum - XL indoor



- 1186 Forum - XS High Performance



- 1186 Forum - FS High Performance



- 1186 Forum - FM High Performance



- 1186 Forum - XL High Performance



- 1186 Forum - XL indoor High Performance



- 1195 Forum - XS reecendido en caliente



- 1195 Forum - FS reecendido en caliente



- 1195 Forum - FM reecendido en caliente



- 1195 Forum - FL reecendido en caliente



- 1195 Forum - XL reecendido en caliente



- 1195 Forum - XL indoor



- 1186 Forum - FL High

The reported luminous flux is the flux emitted by the light source with a tolerance of  $\pm 10\%$  compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated