
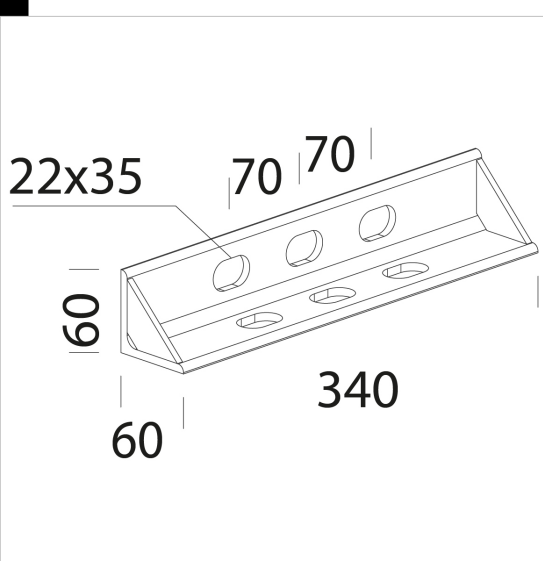


345 soporte a pared

Utilizar para la instalación del Forum 1 módulo LED directamente en la pared.

Download

DXF 2D
- 345bis.dxf

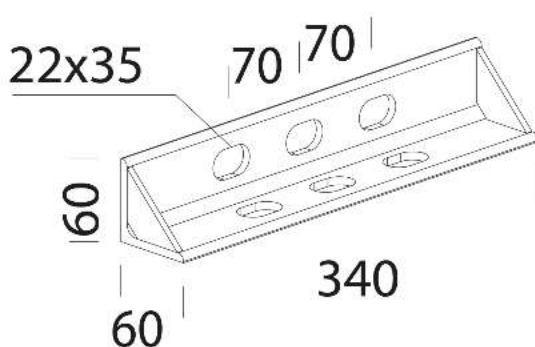

Code	Kg	WTot	Colour
995772-00	1,90	0 W	GRAFITO

Prodotti



- 2183 Forum LED - 1 módulo -



- 2180 Forum LED - 1 módulo -



- 2181 Forum LED - 1 módulo -



- 2182 Forum LED - 1 módulo -



- 2185 Forum LED - 1 módulo -
asimétrico



- 2186 Forum LED - 1 módulo -
intensivo XS



- 2187 Forum LED - 1 módulo -
intensivo S



- 2189 Forum LED HE - 1
módulo - asimétrico - high
efficiency



- 2188 Forum LED HE - 1
MODULO - simétrico



- 2177 Forum LED HE - 1
módulo - asimétrico 50°



- 2184 Forum LED - 1 módulo -
asimétrico 60°

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated