
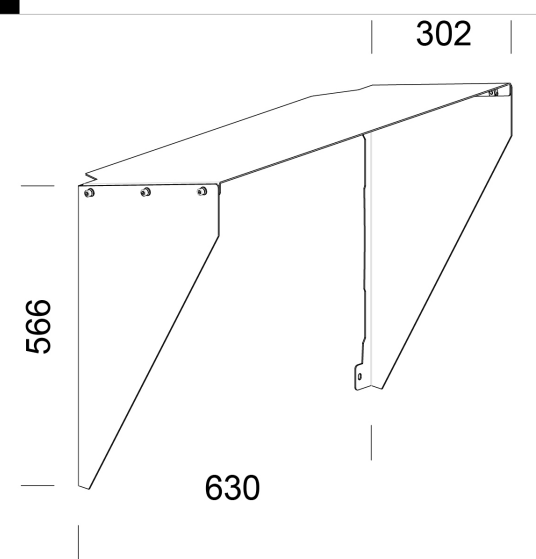


482 Deflector anti-deslumbramiento 3mod

De acero. Permite apantallar el haz luminoso.

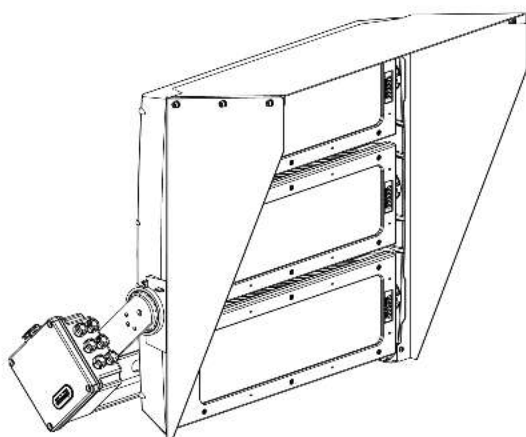

Code	Kg	WTot
995786-00	3,12	0 W

Prodotti



- 2192 Forum LED - 2 módulos -



- 2196 Forum LED - 2 módulos -



- 2195 Forum LED - 2 módulos -



- 2197 Forum LED - 2 módulos -



- 2190 Forum LED - 2 módulos -
simétrico MS



- 2193 Forum LED - 2 módulos -
simétrico XW



- 2191 Forum LED - 2 módulos -
simétrico M



- 2198 Forum HE - 2 módulos -
simétrico



- 2199 Forum HE - 2 módulos -
asimétrico



- 2200 Forum HE - 2 módulos -
asimétrico 50°



- 2194 Forum LED - 2 módulos -
asimétrico 60°



- 3230 Forum type B_old



- 3231 Forum type B_old



- 3192 Forum type B_old



- 3232 Forum type B_old



- 3195 Forum type B_old



- 3196 Forum type B_old



- 3198 Forum type B_old



- 3230 Forum type A_old



- 3231 Forum type A_old



- 3192 Forum type A_old



- 3232 Forum type A_old



- 3195 Forum type A_old



- 3196 Forum type A_old



- 3198 Forum type A_old



- 3230 Forum WICOP_old



- 3231 Forum type C_old



- 3192 Forum type C_old

Download

DXF 2D
- 483.dxf

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated

482 Deflector anti-deslumbramiento 3mod

Prodotti



- 3232 Forum type C_old



- 3195 Forum type C_old



- 3196 Forum type C_old



- 3198 Forum type C_old

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated