



907 Springs

Springs for recessed non-surface mounting on plasterboard. Bag containing 4 pieces.



590x590 290x1190

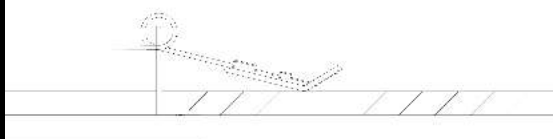

Download

Montaggi
- 907 03-21.pdf
- 907.pdf

Code	Kg	WTot	Colour
998038-00	0,05	0 W	CINCADO

Prodotti

	- 840 LED Panel - UGR<19 -		- 840 LED Panel R - UGR<19 -		- 842 LED Panel - UGR<19 -		- 842 LED Panel R - UGR<19 -
	- 832 Rodi UGR<22		- 844 LED Panel HE - UGR<19 - CRI80 - DIP SWITCH		- 832 Rodi R UGR<22		- 830 Rodi UGR<19
	- 830 Rodi R UGR<19		- 812 Comfortsquare TW - BASIC sensor de presencia y luminosidad		- 813 Comfortsquare HCL - WIRELESS - sensor de presencia y luminosidad		- 810 Comfortsquare - 76° - DIP SWITCH
	- 811 Comfortsquare - 43° - DIP SWITCH		- 833 Creta - UGR<17		- 831 Rodi IP65 - UGR<22		- 831 Rodi R IP65 - UGR<22

The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The W tot column indicates the total wattage absorbed by the system without exceeding 10% of the indicated